

# Actuator LA14 Endstop signals and relative positioning - Single hall Connection diagram






## Connection diagram

### 14XXXXXXXX0K0X0X=XX1XXXXXXXXXX



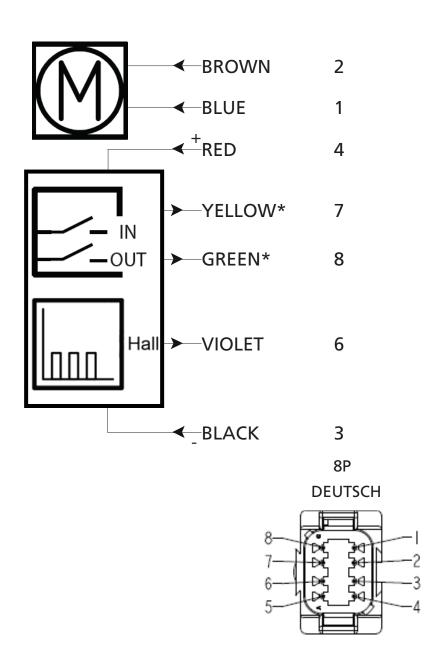

\*YELLOW/GREEN: Endstop signals out are NOT potential free (see specifications on next page)



**Tip:** If you wish to use the endstop signals, you will have to keep power on the red and black wires, otherwise the signal will be lost.



## I/O Specifications

The actuator can be equipped with Single hall that gives a relative positioning feedback signal when the	
actuator moves. See connection diagram, figure above	Hall
12 or 24 VDC (+/-)  12 V ± 20%  24 V ± 10%	To extend actuator: Connect Brown to positive To retract actuator: Connect Brown to negative
Under normal conditions: 12 V, max. 5 A depending on load 24 V, max. 2,5 A depending on load	To extend actuator: Connect Blue to negative To retract actuator: Connect Blue to positive
Signal power supply (+) 12-24 VDC	Current consumption: Max. 40 mA, also when the
Signal power supply GND (-)	actuator is not running
Endstop signal out	Output voltage min. V <sub>IN</sub> - 2 V
Endstop signal in	Source current max. 100 mA NOT potential free
Single Hall output (PNP)  Movement per single Hall pulse: LA14020 Actuator = 0.2 mm per pulse LA14040 Actuator = 0.4 mm per pulse  Frequency: Frequency is 14-26 Hz on Single Hall output depending on load.  Input:  Single hall output	Output voltage min. V <sub>IN</sub> - 2 V Max. current output: 12 mA Max. 680 nF N.B. For more precise measure- ments, please contact LINAK A/S. Low frequency with a high load. Higher frequency with no load.
Hall A Micro - Processor	
	actuator moves. See connection diagram, figure above  12 or 24 VDC (+/-)  12 V ± 20% 24 V ± 10%  Under normal conditions: 12 V, max. 5 A depending on load 24 V, max. 2,5 A depending on load  Signal power supply (+) 12-24 VDC  Signal power supply GND (-)  Endstop signal out  Endstop signal in  Single Hall output (PNP)  Movement per single Hall pulse: LA14020 Actuator = 0.2 mm per pulse LA14040 Actuator = 0.4 mm per pulse  Frequency: Frequency: Frequency is 14-26 Hz on Single Hall output depending on load.  Input:  Single hall output  Micro - Processor

Terms of use

LINAK® takes great care in providing accurate and up-to-date information on its products. However, the user is responsible for determining the suitability of LINAK® products for a specific application.

Due to continuous development, LINAK products are subject to frequent modifications and changes. LINAK reserves the rights to conduct modifications, updates, and changes without any prior notice. For the same reason, LINAK cannot guarantee the correctness and actual status of imprinted information on its products.

LINAK uses its best efforts to fulfil orders. However, for the reasons mentioned above, LINAK cannot guarantee availability of any particular product at any given time. LINAK reserves the right to discontinue the sale of any product displayed on its website or listed in its catalogues or in other written material created and produced by LINAK, LINAK subsidiaries, or LINAK affiliates.

All sales are subject to the "Standard Terms of Sale and Delivery for LINAK A/S". Please contact LINAK for a copy.