

Actuator LA36 With I/O Basic


Connection Diagram





Connection diagram

36XXXXXXXA3XX=XXXXXXXXXXXXXXXXX

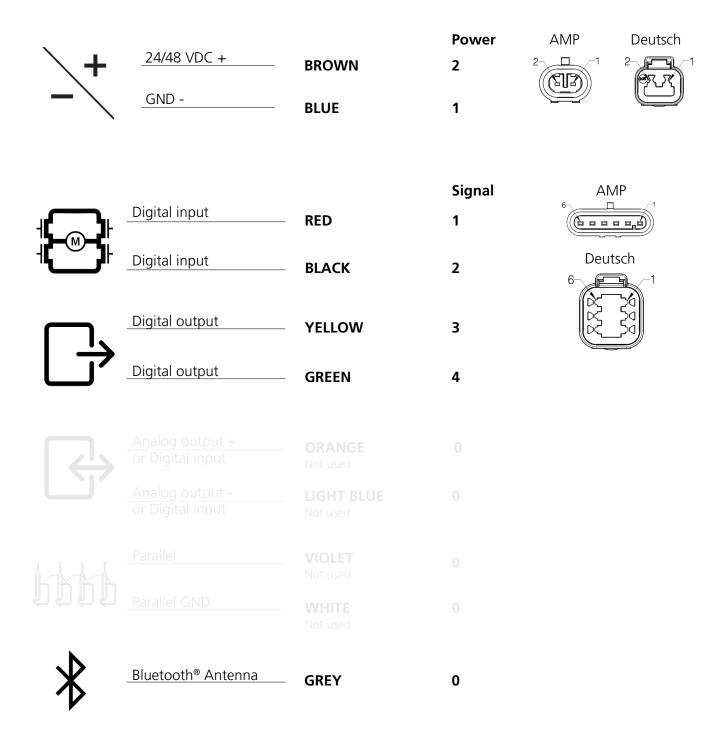



Not used*: The I/O Basic actuator can be upgraded to I/O Full, if more functionality is needed - even after purchase. Connect the actuator to Actuator Connect TM via Bluetooth® or a USB adapter cable (must be purchased seperately), and request an unlock key from your local LINAK office.

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG Inc. Any use of such marks and logos by LINAK® is under license.

I/O specifications

Input/Output	Specification	Comments
Description	IC - I/O is a universal industrial interface developed by LINAK®.	
	I/O is a common term used, to describe inputs and outputs As part of the IC (Integrated Controller) range, the IC - I/O interface is offering a range of digital and analogue in- and outputs. It can be deployed through all industries.	I/O
Brown	24 VDC, current limit 13 A 48 VDC, current limit 8 A	Note: Do not swap the power supply polarity on the brown and blue wires!
		The PCB is coupled to the housing through a capacitor.
Blue	- (GND) Connect Blue to negative	If the temperature drops below 0 °C, all current limits will automatically increase with a factor 2.
Red	Extends the actuator	The signal becomes active at:
	-Standard run	$> 67\% \text{ of V}_{IN} = ON$
Black	Retracts the actuator	The signal becomes inactive at:
	-Standard run	$< 33\%$ of $V_{IN} = OFF$
		Input current: 10 mA
Yellow	Digital position output	Digital outputs:
	- Endstop reached (inwards)	The digital output is active high
Green	Digital position output	- Output voltage min. V _{IN} - 2 V
	- Endstop reached (outwards)	- Source current max. 100 mA
Orange	Not to be used	Actuator can be upgraded to Full version
		- wire is then used as either an analogue
		output or digital input.
Light Blue	Not to be used	Actuator can be upgraded to Full version - wire is then used as either an analogue output or digital input.
Purple	Not to be used	Actuator can be upgraded to Full version - wire is then used as parallel communication
White	Not to be used	Actuator can be upgraded to Full version - wire is then used as parallel common GND
Grey	Antenna for Bluetooth®	The grey wire is used to strengthen the Bluetooth signal, allowing a stable wireless connection and has no functionality during operation.



Find more information about the IC - I/O actuators in the IC - I/O user manual
The newest version is available online at LINAK.COM/TECHLINE



Terms of use

Terms of use
LINAK® takes great care in providing accurate and up-to-date information on its products. However, the
user is responsible for determining the suitability of LINAK products for a specific application.
Due to continual development, LINAK products are subject to frequent modifications and changes.
LINAK reserves the rights to conduct modifications, updates, and changes without any prior notice. For
the same reason, LINAK cannot guarantee the correctness and actual status of imprinted information on
its products.

LINAK uses its best efforts to fulfil orders. However, for the reasons mentioned above, LINAK cannot guarantee availability of any particular product at any given time. LINAK reserves the right to discontinue the sale of any product displayed on its website or listed in its catalogues or in other written material created and produced by LINAK, LINAK subsidiaries, or LINAK affiliates.

All sales are subject to the 'Standard Terms of Sale and Delivery for LINAK A'S' available on LINAK websites. LINAK and the LINAK logotype are registered trademarks of LINAK A/S. All rights reserved.

