

Linear Actuator LA25

Data Sheet



Contents

Introduction.....	3
Safety instructions.....	3
Features.....	5
Options in general.....	5
Usage.....	5
Ordering example	6
Technical specifications	9
Housing for harsh environments	10
Reinforced actuator	10
Speed and current curves.....	11
Current limits	13
Current cut-offs.....	13
Stroke and built-in tolerances.....	14
Built-in dimensions.....	15
Piston rod eyes.....	19
Back fixtures	22
Back fixture orientation.....	25
Cable mounting.....	26
Cables	27
Power + signal cable dimensions.....	27
8-pin connector cable item numbers.....	27
Power + signal cable dimensions.....	28
Power + signal cable dimensions.....	29
Power + signal cable dimensions.....	30
Power + signal cable dimensions.....	31
Electrical installation.....	32
Environmental tests – Climatic	33
Environmental tests – Mechanical	35
Environmental tests - Electrical	36
Non-complying standards	37

Introduction

Compact designed linear actuator ideal for narrow spaces. Comes with a high IP degree and aluminium housing and is suited to operate in almost any conditions.

With its robust design, high IP degree and aluminium housing, the actuator LA25 is ideal for harsh environments where operation under extreme conditions is required.

Safety instructions

Please read this safety information carefully.

Be aware of the following three symbols throughout the document:



Warning!

Failing to follow these instructions can cause accidents resulting in serious personal injury.



Recommendations

Failing to follow these instructions can result in the actuator suffering damage or being ruined.



Additional information

Usage tips or additional information that is important in connection with the use of the actuator.

Furthermore, ensure that all staff who are to connect, mount, or use the actuator are in possession of the necessary information and that they have access to this document.

Persons who do not have the necessary experience or knowledge of the product/products must not use the product/products. Besides, persons with reduced physical or mental abilities must not use the product/products, unless they are under surveillance or they have been thoroughly instructed in the use of the apparatus by a person who is responsible for the safety of these persons.

Moreover, children must be under surveillance to ensure that they do not play with the product.

Before you start mounting/dismounting, ensure that the following points are observed:

- The actuator is not in operation.
- The actuator is free from loads that could be released during this work.

Before you put the actuator into operation, check the following:

- The actuator is correctly mounted as indicated in the relevant user instructions.
- The equipment can be freely moved over the actuator's whole working area.
- The actuator is connected to a mains electricity supply/transformer with the correct voltage and which is dimensioned and adapted to the actuator in question.
- Ensure that the voltage applied matches to the voltage specified on the actuator label.
- Ensure that the connection bolts can withstand the wear.
- Ensure that the connection bolts are secured safely.

During operation, please be aware of the following:

- Listen for unusual sounds and watch out for uneven running. Stop the actuator immediately if anything unusual is observed.
- Do not sideload the actuator.
- Only use the actuator within the specified working limits.
- Do not step on or kick the actuator.

When the equipment is not in use:

- Switch off the mains supply in order to prevent unintentional operation.
- Check regularly for extraordinary wear.

Classification

The equipment is not suitable for use in the presence of a flammable anaesthetic mixture with air or with oxygen or nitrous oxide.

**Warnings**

- Do not sideload the actuator.
- When mounting the actuator in the application ensure that the bolts can withstand the wear and that they are secured safely.
- If irregularities are observed, the actuator must be replaced.

**Recommendations**

- Do not place load on the actuator housing.
- Prevent impact or blows, or any other form of stress to the housing.
- Ensure that the cable cover is mounted correctly. Use 3.5 Nm torque.
- Ensure that the duty cycle and the usage temperatures for LA25 actuators are respected.
- Ensure that the cable cannot be squeezed, pulled or subjected to any other stress.
- Furthermore, it will be good practice to ensure that the actuator is fully retracted in the "normal" position. The reason is that there will be a vacuum inside the actuator if it is extended which over time can lead to water entering the actuator.

Features

- Protection class: IP66 for outdoor use (dynamic). Furthermore, the actuator can be washed down by a high pressure cleaner (IP69K - static)
- Heavy-duty aluminium housing for harsh conditions
- Mechanical endstop
- Guided nut
- Static safety factor: 2.0
- Noise level: Max. 58.5 dB(A) at nominal voltage and with no load, according to EN ISO 3743-1

Options in general

- 12 / 24 V DC Brushed motor
- Load from 600 N - 2,500 N
- Max. speed 2.5 to 25 mm/sec. depending on load and spindle pitch
- Stroke length from 20 mm to 600 mm (Zero Point: 100 to 600 mm)
- Steel or stainless steel back fixture and piston rod eye
- Colour: Dark olivish grey or black
- Safety nut in push or pull (2,500 N version: only safety nut in push; 600 N version: no safety nut)
- Exchangeable cables in different lengths
- Analogue or digital feedback for precise positioning
- Endstop reached signals
- Built-in Zero Point or endstop switch initialisation principle
- Hall effect sensor for precise positioning
- Special anodised housing for extreme environments
- CCC Ex, IECEx/ATEX certified for Zone 21
- IC options (see specific interface user manuals at the [TECHLINE webpage](#) for Connection Diagrams and I/O Specifications) including:
 - I/O
 - IO-Link
 - LIN bus
 - CAN bus J1939
 - CANopen
 - Modbus RTU
 - Modbus TCP/IP
 - Ethernet/IP
 - Profinet
- PC configuration tool (Actuator Connect™ and BusLink)

Usage

- Duty cycle is max. 20% (4 min. drive and 16 min. rest)
The duty cycles and full performance are valid for operation within an ambient temperature of +5°C to +40°C
- Ambient operating temperature: -40°C to +85°C (for IECEx/ATEX: T135 -25°C to +65°C; T125 -25°C to +55°C)
- Storage temperature: -55°C to +105°C



For more information about interfaces, please see the respective user manual on LINAK.com.

Ordering example

25 030 XXX 00 0K 0 A 0 A = 3 1 3 J S 1 0 0 0 0 XXX

Actuator type	25	= LA25		
Spindle type	030	= 3 mm		
	060	= 6 mm		
	090	= 9 mm		
	120	= 12 mm		
	200	= 20 mm		
Stroke length	XXX	= mm		
Safety	00	= None		
	0A	= Safety nut		
Feedback	00	= None		
	0K	= Single Hall		
	0A	= Hall potentiometer (Analogue feedback)		
	0F	= PWM		
Platform	8-pin connector		12-pin connector	
	A	= IO-Link	B	= I/O Basic
	0	= None	C	= I/O Customised
	6	= LIN bus	F	= I/O Full
	7	= CAN bus J1939	Q	= Modbus RTU
	9	= CANopen	S	= IO-Link
	12-pin connector (with split supply)			
	E	= Ethernet/IP*		
	G	= CAN bus J1939		
	H	= CANopen		
	P	= Profinet		
	T	= Modbus TCP/IP	X	= Special
Motor type	A	= 12 V BDC		
	B	= 24 V BDC		
Endstop	0	= Power switch		
	1	= Signal switch		
	2	= Zero point		
IP	A	= IP66 + IP69K		
	B	= IP66 + IP69K + stainless steel screws		
	C	= IP66 + Reinforced (vibration proof)		
	D	= IP66 + IP69K Reinforced + stainless steel screws (vibration proof)		
	T	= IECEx + ATEX (not for 12-pin connector)		
	U	= IECEx + ATEX + stainless steel screws (not for 12-pin connector)		
	9	= Harsh environment + IP66/IP69K		
Colour	=	= Dark Olivish Grey NCS S7000-N		
	-	= Black RAL 9005 (Harsh environment)		

* Actuators with Ethernet/IP are only compatible with Plug type E and Cable type S (ordering number: 0257079)

Ordering example

25 030 XXX 00 0K 0 A 0 A = 3 1 3 J S 1 0 0 0 0 XXX

Back fixture	Zinc-coated steel - slotted		Stainless steel - slotted	
	1	= ø10.2 (0251011)	A	= ø10.2 (0251015)
	2	= With bushings ø10.2	B	= With bushings ø10.2
	3	= ø12.3 (0251010)	C	= ø12.3 (0251014)
	4	= With bushings ø8.2	D	= With bushings ø8.2
	5	= ø10.2 + nut (0251032)	F	= ø10.2 + nut (0251034)
	6	= With bushings ø10.2 + nut	G	= With bushings ø10.2 + nut
	7	= ø12.3 + nut (0251026)	H	= ø12.3 + nut (0251033)
	8	= With bushings ø8.2 + nut	I	= With bushings ø8.2 + nut
	M	= Male adapter M12 (0251021)	X	= Special
Back fixture orientation	1	= 0 degrees		
	2	= 90 degrees		
Piston rod eye	Zinc-coated steel		Stainless steel	
	1	= ø10.2 (0231033)	A	= ø10.2 (0231096)
	2	= With bushings ø10.2	B	= With bushings ø10.2
	3	= ø12.3 (0231016)	C	= ø12.3 (0231095)
	4	= With bushings ø8.2	D	= With bushings ø8.2
			K	= Ball eye ø10 H7 (0351053)
			L	= Ball eye ø12 H7 (0351035)
			F	= Female adapter M8 (0251039)
			M	= Male adapter M12 (231094)
			X	= Special
Plug type	O	= None (when no cable is chosen)		
	C	= Flying leads (when connector is not wanted)		
	E	= Ethernet M12 Y-cable (0257079)*		
	P	= IO-Link M12 Y-cable (0257077)		
	R	= Modbus RTU M12 Y-cable (0257078)		
	I	= Moulded Deutsch (DT4)		
	J	= Deutsch (DT4)		
	K	= AMP superseal		
	L	= Moulded AMP superseal		
	M	= M12 5P (Only IO-Link length: 0.3 m)		
	X	= Special		
Cable	O	= None		
	S	= Straight 0.75 m (8-core or 2-core when no feedback is needed)*		
	T	= Straight 1.5 m (8-core or 2-core when no feedback is needed)		
	R	= Straight 5.0 m (8-core or 2-core when no feedback is needed)		
	U	= Straight 0.3 m (Only IO-Link)		
	V	= Straight 10 m		
	Y	= Straight 1.5 m (11-core)**		
	Z	= Straight 5 m (11-core)**		
	P	= Y-cable 2 m (Bus only)		
	X	= Special		

* Actuators with Ethernet/IP are only compatible with Plug type E and Cable type S (ordering number: 0257079)

** Cable options Y and Z are only available with Plug type C or I.

Ordering example

25 030 XXX 00 0K 0 A 0 A = 3 1 3 J S 1 0 0 0 0 XXX

Endstop reached output

CAN / LIN / IO-Link (8-pin)

0 = None

Standard (8-pin)

0 = None

1 = Yes

IC Basic (8-pin)

1 = Yes

IC Parallel (8-pin)

1 = A_HIGH / A_HIGH

IC Parallel with Feedback (8-pin)

X = Special

IC Advanced (8-pin) and I/O (12-pin)

0 = None

A = A_HIGH / A_HIGH

B = A_LOW / A_HIGH

C = A_HIGH / A_LOW

D = A_LOW / A_LOW

E = LOW / A_HIGH

F = HIGH / A_HIGH

G = LOW / A_LOW

H = HIGH / A_LOW

J = A_HIGH / LOW

K = A_LOW / LOW

L = A_HIGH / HIGH

M = A_LOW / HIGH

N = LOW / LOW

P = HIGH / LOW

Q = LOW / HIGH

R = HIGH / HIGH

X = Special

Feedback level

CAN / LIN / IO-Link

0 = None

Standard

0 = None

1 = 0 - 10 V

2 = 0.5 - 4.5 V

3 = 4 - 20 mA

4 = 10 - 90%

5 = 20 - 80%

9 = Special

IC Basic

8 = None

IC Advanced and I/O

0 = None

A = 0 - 10 V

B = 0.5 - 4.5 V

C = 4 - 20 mA

D = 10 - 90% (Only IC Advanced)

E = 20 - 80% (Only IC Advanced)

G = 1 - 9 V

X = Special

IC Parallel

Z = IC Parallel

Y = Parallel with feedback

X = Special

Load type

0 = Push/Pull

1 = Push

2 = Pull

Parallel mode

0 = None OR Non-critical Parallel (For IC Parallel only)

2-8 = Critical Parallel

SW config.

0 = Standard configuration

X = Special configuration

Built-in dimensions

xxx = Measured in mm

Technical specifications

12 V

Load max. (N)	Self-lock min. (N)				Pitch (mm/ spindle rev.)	Hall resolution (mm/count)	Typical speed (mm/s)		Standard stroke lengths (mm)	Typical amp. (A)	
	With short circuit		Without short circuit				No load	Full load		No load	Full load
	Self- lock (N)	*Back- drive (mm)	Self- lock (N)	*Back- drive (mm)							
2500	2500	1	2500	1	3	0.125	3.1	2.5	20-500	0.8	3.8
1500	1500	1	1500	2	6	0.250	6.6	5.2	20-600	0.8	3.8
1200	1200	2	1200	4	9	0.375	9.9	7.5	20-600	0.9	4.0
900	900	3	900	7	12	0.500	13	9.6	20-600	0.9	3.8
600	600	5	600	12	20	0.830	25	18	20-600	0.9	4.0

24 V

Load max. (N)	Self-lock min. (N)				Pitch (mm/ spindle rev.)	Hall resolution (mm/count)	Typical speed (mm/s)		Standard stroke lengths (mm)	Typical amp. (A)	
	With short circuit		Without short circuit				No load	Full load		No load	Full load
	Self- lock (N)	*Back- drive (mm)	Self- lock (N)	*Back- drive (mm)							
2500	2500	1	2500	1	3	0.125	3.2	2.6	20-500	0.4	1.9
1500	1500	1	1500	2	6	0.250	6.4	5.5	20-600	0.4	1.9
1200	1200	2	1200	4	9	0.375	9.5	8.1	20-600	0.4	2.0
900	900	3	900	7	12	0.500	12.6	10.4	20-600	0.4	1.9
600	600	5	600	12	20	0.830	25	18	20-600	0.4	2.0



- To ensure maximum self-locking ability, please make sure that the motor is shorted when stopped. Actuators with Integrated Controller provide this feature, as long as the actuator is powered.
- When using soft stop on a DC-motor, a short peak of higher voltage will be sent back towards the power supply. It is important when selecting the power supply that it does not turn off the output when this backwards load dump occurs.



- A Hall count occurs every time the signal changes state (high to low or vice versa). Two Hall counts (positive and negative) create a Hall pulse.
- The typical values can have a variation of $\pm 20\%$ on the current values and $\pm 10\%$ on the speed values. Measurements are made with an actuator in connection with a stable power supply and an ambient temperature of 20°C.
- Please note that all actuators featuring 'soft stop towards endstop' will run at a regulated speed, which is typically around 80% of the nominal speed.

Housing for harsh environments

This housing (ordering example value IP: 9) should be recommended for use in particularly harsh environments such as stables, where the actuator is in touch with extremely corrosive liquids and/or vapours such as ammoniac.

The anodised housing option embodies a special surface treatment of the aluminium housing in order to reduce corrosion of the housing and avoid any vapours or liquids entering the actuator.

The anodised housing is also certified IP66/IP69K. This is only available in the colour black.

Reinforced actuator



This type of actuator (ordering example value IP: C and D) is robust against vibrations and high ambient temperatures up to 85°C.

When ordering this type of actuator, you receive:

- Manually added glue on the screws for the outer tube and motor
- A motor wire manually secured with glue
- A back fixture secured with an M27 nut



The reinforced design enables the actuator to pass the TECHLINE® vibration test at an ambient temperature of 85°C*.

A standard actuator passes the TECHLINE vibration test at an ambient temperature of 25°C.

* See more info under 'Environmental tests - Mechanical'.



Speed and current curves

The charts below display typical values made with a nominal power supply and an ambient temperature of 20°C.

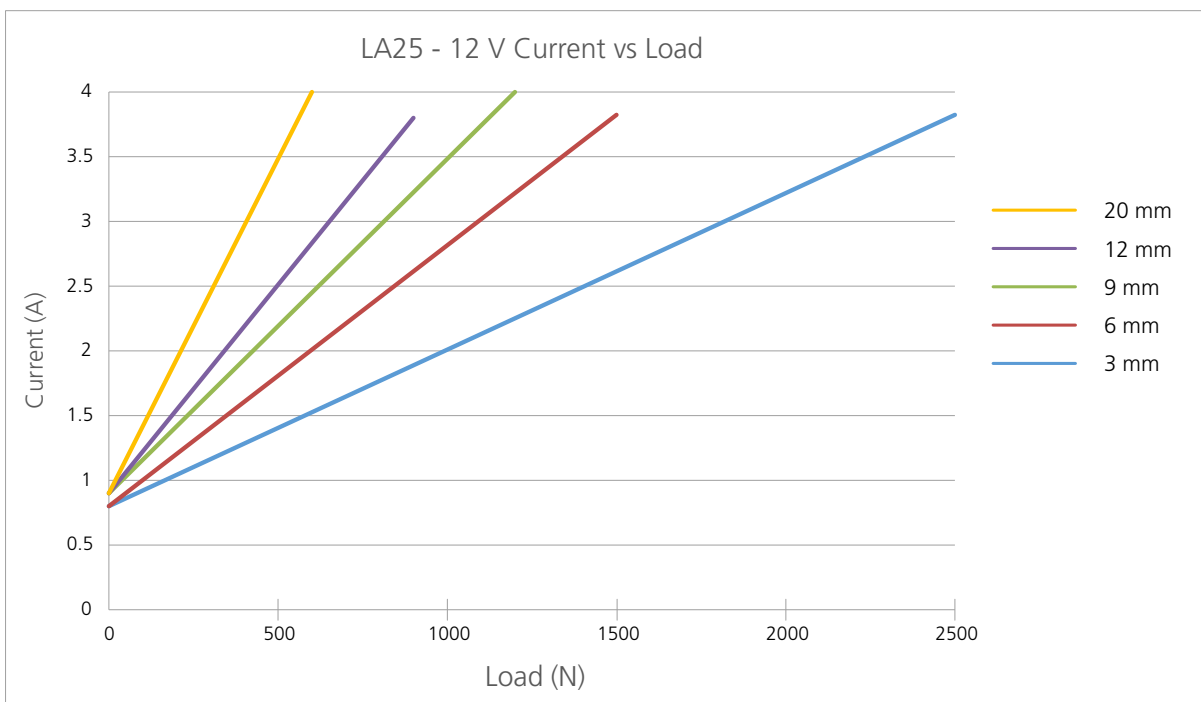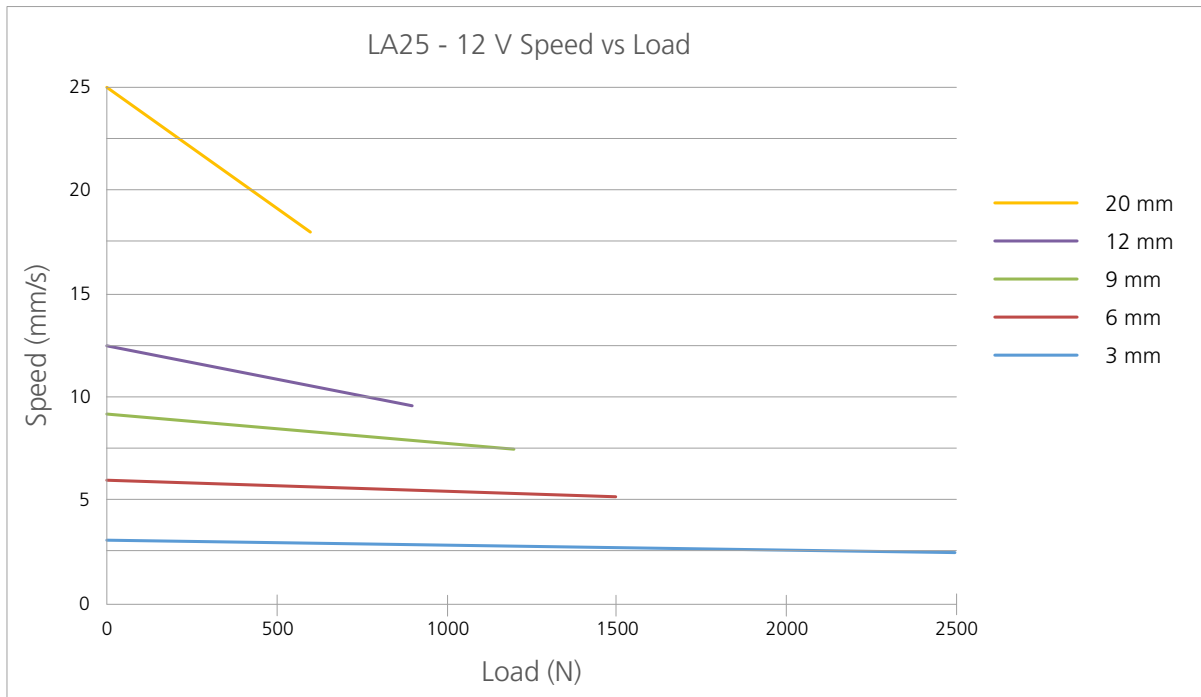

Speed and Current Curves

The charts below display typical values made with a nominal power supply and an ambient temperature of 20° C.

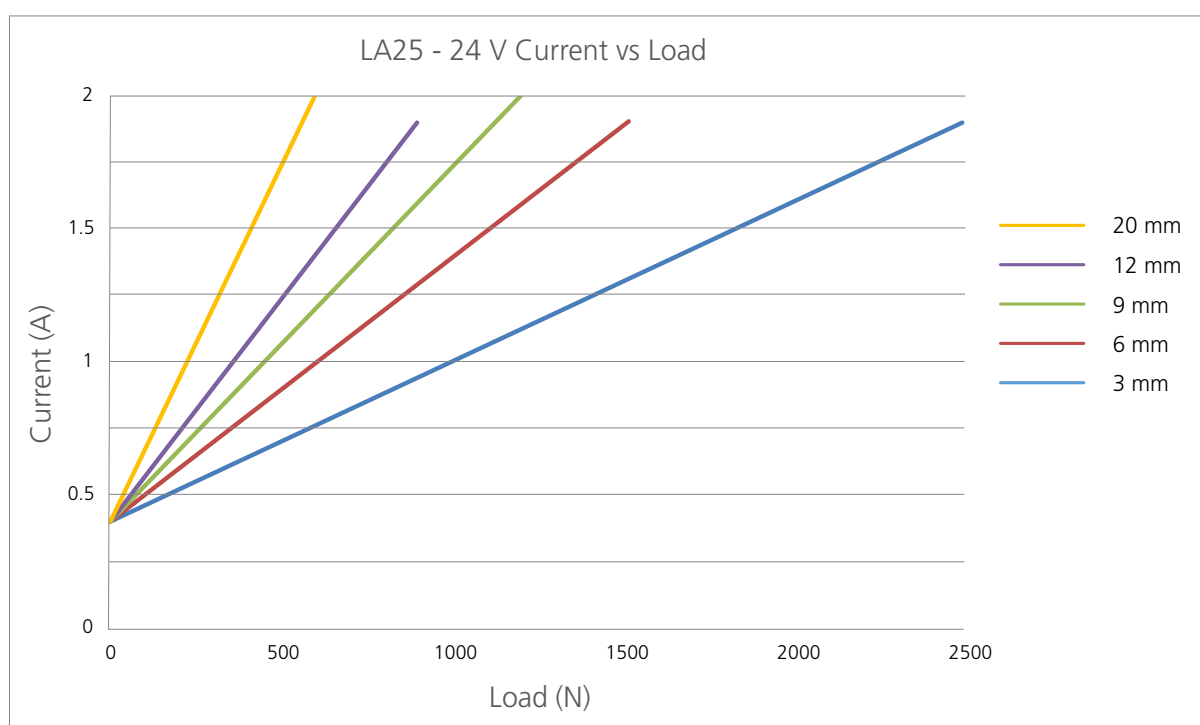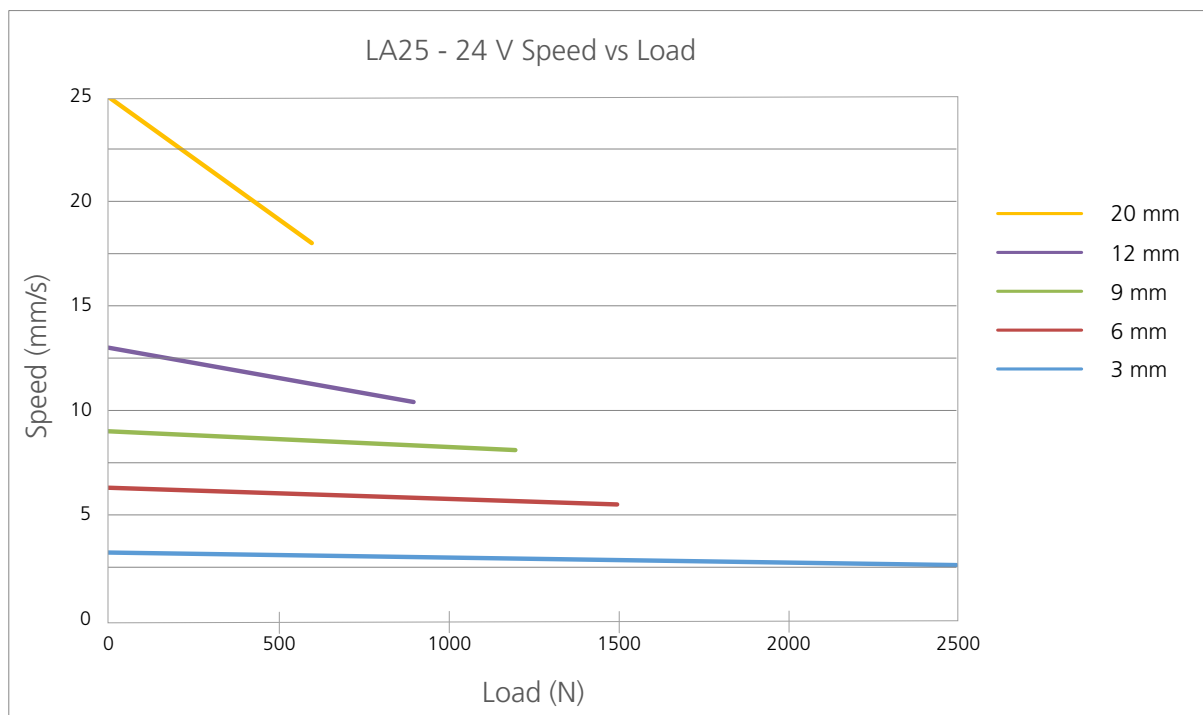

Current limits

If the actuator's current consumption rises above the set limit, the actuator regulates and tries to keep it below the set current limit by reducing the PWM and therefore also the speed accordingly. The actuator does this continuously, until the actuator stops moving (mechanically blocked). If there are no changes to the Hall feedback signal during the set time frame, the integrated controller will cut power to the H-bridge motor circuit.

If the actuator is stopped due to the above-mentioned criteria, it automatically drives slightly in the opposite direction to reduce the torque in a blocking situation.

For more detailed information, please see the I/O interface manual.

Platform		12 V	24 V	Reference temperature: 0°C
A B C E F G	IO-Link (8-pin) I/O Basic I/O Customised Ethernet/IP with split supply I/O Full CAN bus J1939 with split supply	8 A	5 A	Above
H P Q S T	CANopen with split supply Profinet with split supply Modbus RTU IO-Link (12-pin) Modbus TCP/IP with split supply			
		9 A	6 A	Below

Current cut-offs

The principle behind the current cut-off measurement is an 'above limit' and a 'below limit' accumulating counter. When the time-out counter reaches a specific value the current cut-off goes into effect. The time-out value is pre-set at 500 ms.

Platform		12 V	24 V	Reference temperature: 0°C
6 7 9	LIN bus CAN bus J1939 CANopen	8 A	5 A	Above
		8 A	8 A	Below

Stroke and built-in tolerances

Platform		Pitch (mm)	Stroke tolerance	Example for 200 mm stroke	BID tolerance	Example for 200 mm BID
0	None with built-in limit switches	3/6/9/12	+2 / -2 mm	198 to 202 mm	+2 / -2 mm	198 to 202 mm
		20	+3 / -1 mm	199 to 203 mm	+2 / -2 mm	198 to 202 mm
A B C E F G H P Q S T	IO-Link (8-pin) I/O Basic I/O Customised Ethernet/IP with split supply I/O Full CAN bus J1939 with split supply CANopen with split supply Profinet with split supply Modbus RTU IO-Link (12-pin) Modbus TCP/IP with split supply	3/6/9/12	+1 / -3 mm	197 to 201 mm	+2 / -2 mm	198 to 202 mm
		20	+2 / -2 mm	198 to 202 mm	+2 / -2 mm	198 to 202 mm

Built-in dimensions

The built-in dimension depends on the chosen safety option and stroke length(s).

				Piston rod types			
				1, 2, 3, 4, A, B, C, D	M / from the surface	K, L / to the centre of the hole	F / from the surface
Back fixture types 1, 2, 3, 4 and A, B, C, D	Safety option	Stroke length	Spindle pitch	Min. built-in dimensions			
	No safety option or Safety nut for push	20 - 49	3	168	165	179	158
			6, 9 or 12	160	157	171	150
	No safety option	20 - 48	20	160	157	171	150
	Safety nut for pull	20 - 49	6, 9 or 12	172	169	183	162
	No safety option or Safety nut for push	50 - 200	3	118 + s*	115 + s	129 + s	108 + s
	No safety option or Safety nut for push	50 - 200	6, 9 or 12	110 + s	107 + s	121 + s	100 + s
	No safety option	49 - 200	20	112 + s	109 + s	123 + s	102 + s
	Safety nut for pull	50 - 200	6, 9 or 12	122 + s	119 + s	133 + s	112 + s
	No safety option or Safety nut for push	201 - 400	3	138 + s	135 + s	149 + s	128 + s
	No safety option	201 - 400	6, 9, 12 or 20	130 + s	127 + s	141 + s	120 + s
	Safety nut for push	201 - 400	6, 9 or 12	130 + s	127 + s	141 + s	120 + s
	Safety nut for pull	201 - 400	6, 9 or 12	142 + s	139 + s	153 + s	132 + s
	No safety option or Safety nut for push	401 - 500	3	158 + s	155 + s	169 + s	148 + s
	No safety option	401 - 600	6, 9, 12 or 20	150 + s	147 + s	161 + s	140 + s
	Safety nut for push	401 - 600	6, 9 or 12	150 + s	147 + s	161 + s	140 + s
	Safety nut for pull	401 - 600	6, 9 or 12	162 + s	159 + s	173 + s	152 + s



These built-in dimensions are measured according to the built-in illustration.

* $118 + s = 118 + \text{stroke length}$

Built-in dimensions

All dimensions are in mm

The built-in dimension depends on the chosen safety option and stroke length(s).

				Piston rod types			
				1, 2, 3, 4, A, B, C, D	M / from the surface	K, L / to the centre of the hole	F / from the surface
Back fixture type M	Safety option	Stroke length	Spindle pitch	Min. built-in dimensions			
	No safety option or Safety nut for push	20 - 49	3	155	152	166	145
	No safety option or Safety nut for push	20 - 49	6, 9 or 12	147	144	158	137
	No safety option	20 - 48	20	147	144	158	137
	Safety nut for pull	20 - 49	6, 9 or 12	159	156	170	149
	No safety option or Safety nut for push	50 - 200	3	105 + s	102 + s	116 + s	95 + s
	No safety option	50 - 200	6, 9 or 12	97 + s	94 + s	108 + s	87 + s
	No safety option	49 - 200	20	99 + s	96 + s	110 + s	89 + s
	Safety nut for push	50 - 200	6, 9 or 12	98 + s	94 + s	108 + s	87 + s
	Safety nut for pull	50 - 200	6, 9 or 12	110 + s	106 + s	120 + s	99 + s
	No safety option or Safety nut for push	201 - 400	3	125 + s	122 + s	136 + s	115 + s
	No safety option	201 - 400	6, 9, 12 or 20	117 + s	114 + s	128 + s	107 + s
	Safety nut for push	201 - 400	6, 9 or 12	117 + s	114 + s	128 + s	107 + s
	Safety nut for pull	201 - 400	6, 9 or 12	129 + s	126 + s	140 + s	119 + s
	No safety option or Safety nut for push	401 - 500	3	145 + s	142 + s	156 + s	135 + s
	No safety option or Safety nut for push	401 - 600	6, 9, 12 or 20	137 + s	134 + s	148 + s	127 + s
	Safety nut for pull	401 - 600	6, 9, 12 or 20	149 + s	146 + s	160 + s	139 + s



These built-in dimensions are measured according to the built-in illustration.

* $118 + s = 118 + \text{stroke length}$

Built-in dimensions

All dimensions are in mm

The built-in dimension depends on the chosen safety option and stroke length(s).

				Piston rod types			
				1, 2, 3, 4, A, B, C, D	M / from the surface	K, L / to the centre of the hole	F / from the surface
Back fixture types 5, 6, 7, 8 and F, G, H, I	Safety option	Stroke length	Spindle pitch	Min. built-in dimensions			
	No safety option or Safety nut for push	20 - 49	3	174	171	185	164
	No safety option or Safety nut for push	20 - 49	6, 9 or 12	166	163	177	156
	No safety option	20 - 48	20	166	163	177	156
	Safety nut for pull	20 - 49	6, 9 or 12	178	175	189	168
	No safety option or Safety nut for push	50 - 200	3	124 + s	121 + s	135 + s	114 + s
	No safety option or Safety nut for push	50 - 200	6, 9 or 12	116 + s	113 + s	127 + s	106 + s
	No safety option	49 - 200	20	118 + s	115 + s	129 + s	108 + s
	Safety nut for pull	50 - 200	6, 9 or 12	128 + s	125 + s	139 + s	118 + s
	No safety option or Safety nut for push	201 - 400	3	144 + s	141 + s	155 + s	134 + s
	No safety option or Safety nut for push	201 - 400	6, 9, 12 or 20	136 + s	133 + s	147 + s	126 + s
	Safety nut for pull	201 - 400	6, 9 or 12	148 + s	145 + s	159 + s	138 + s
	No safety option or Safety nut for push	401 - 500	3	164 + s	161 + s	175 + s	154 + s
	No safety option or Safety nut for push	401 - 600	6, 9, 12 or 20	156 + s	153 + s	167 + s	146 + s
	Safety nut for pull	401 - 600	6, 9, 12 or 20	168 + s	165 + s	179 + s	158 + s




These built-in dimensions are measured according to the built-in illustration.

* $118 + s = 118 + \text{stroke length}$

Built-in dimensions

All dimensions are in mm

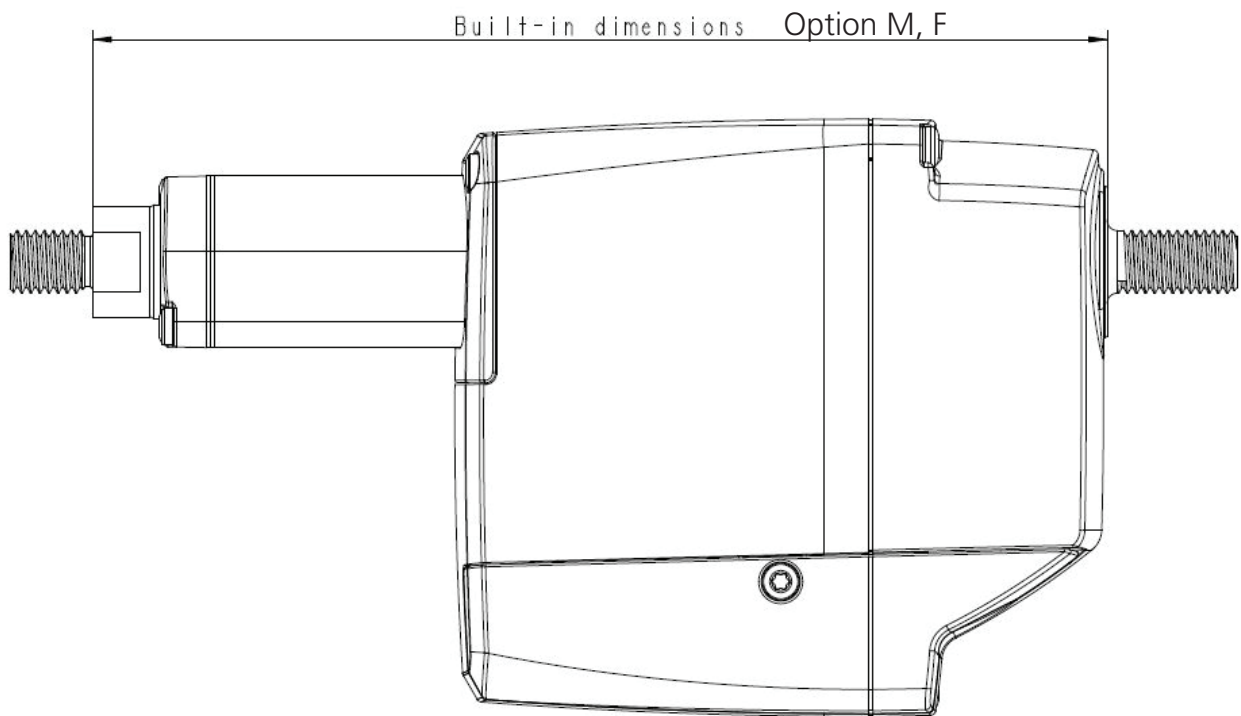



To have an extended BID, the BID must be at least 6 mm longer than the standard BID.

Piston rod eyes

Option "1" and "A"

LINAK P/N: 0231033, zinc-coated steel



LINAK P/N: 0231096, AISI 304

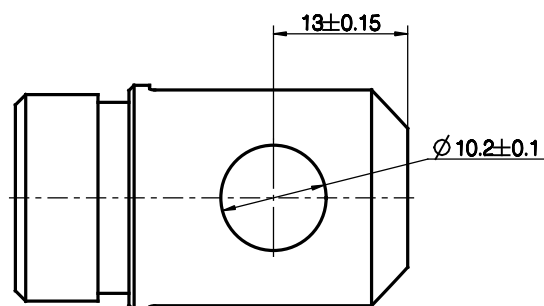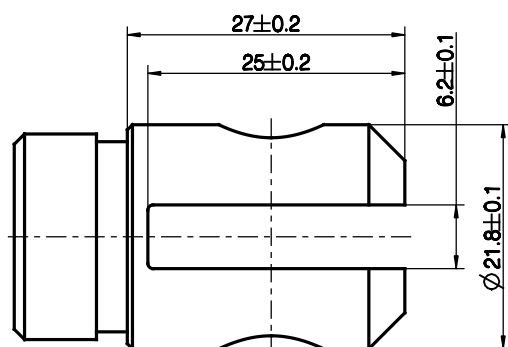

Option "2" and "B"

LINAK P/N: 0231016 with bushings, zinc-coated steel

LINAK P/N: 0231095 with bushings, AISI 304

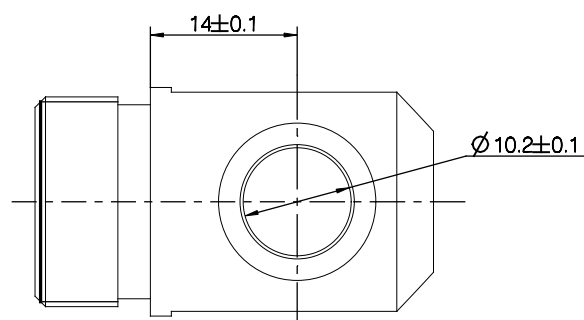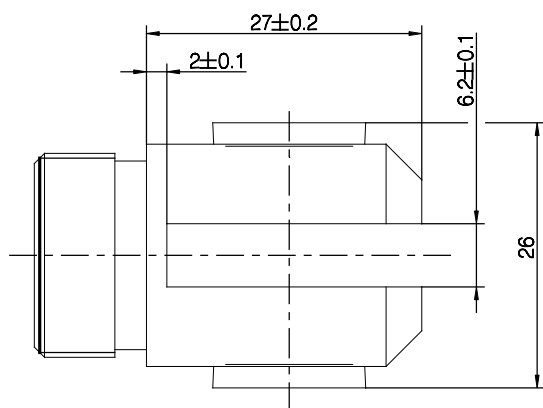



The piston rod eye is only allowed to turn 0 - 90 degrees.

Piston rod eyes

Option "3" and "C"

LINAK P/N: 0231016, zinc-coated steel



LINAK P/N: 0231095, AISI 304

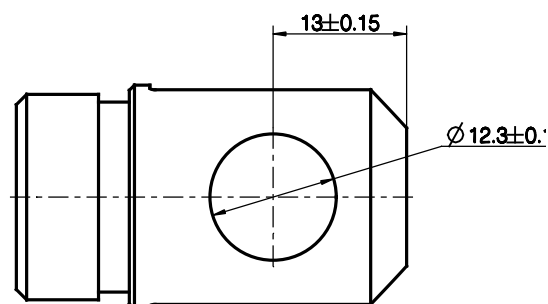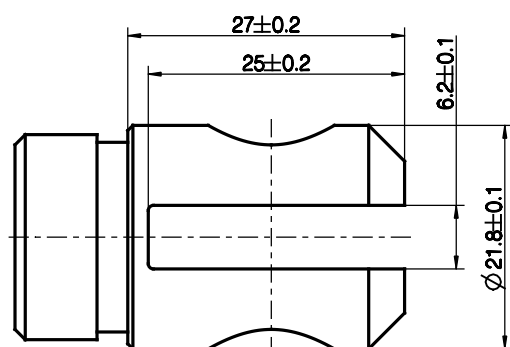

Option "4" and "D"

LINAK P/N: 0231033 with bushings, zinc-coated steel

LINAK P/N: 0231096 with bushings, AISI 304

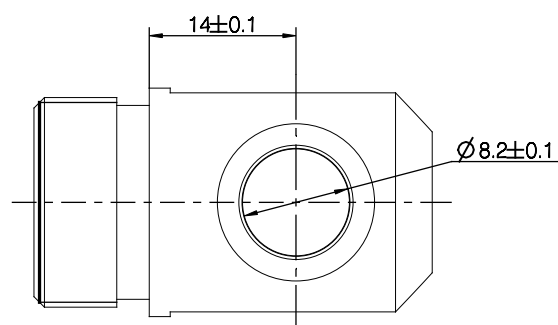
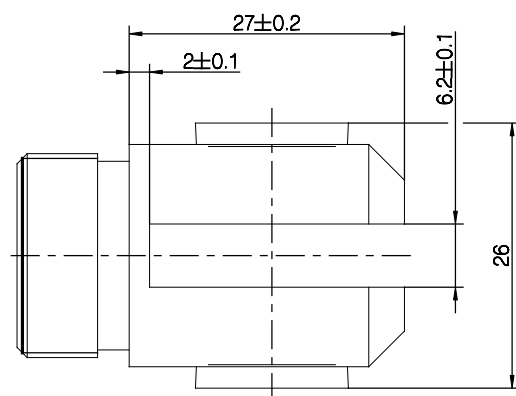


The piston rod eye is only allowed to turn 0 - 90 degrees.

Piston rod eyes



Option "K"

LINAK P/N: 0351053, AISI 304

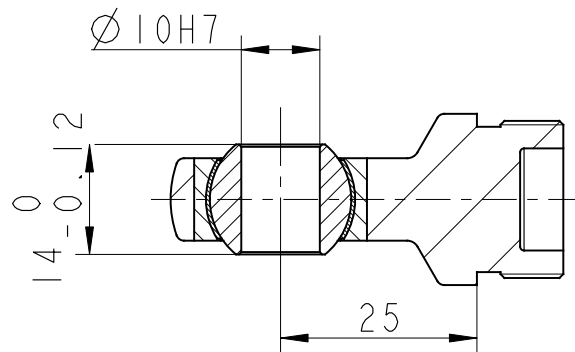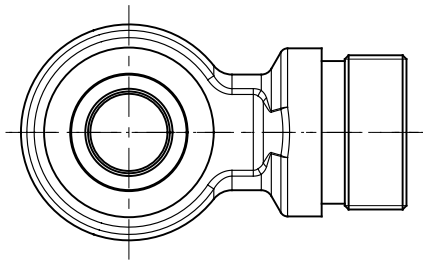



Option "L"

LINAK P/N: 0351035, AISI 304

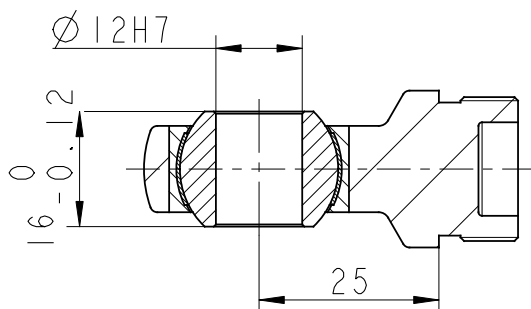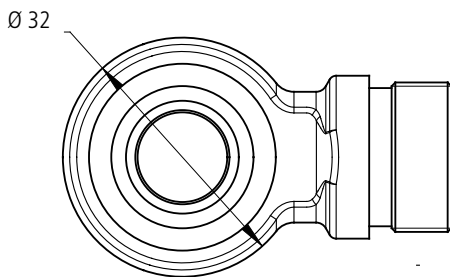



Option "F"

LINAK P/N: 0251039, AISI 303



Option "M"

LINAK P/N: 0231094, AISI 304

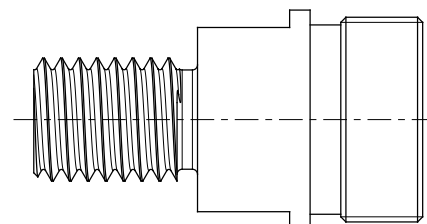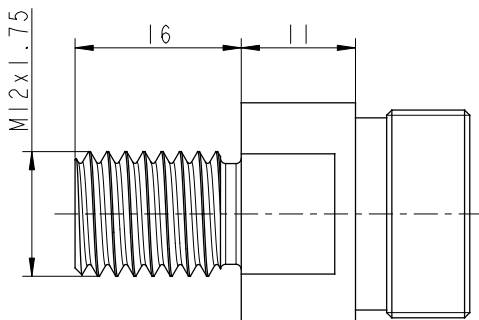



The piston rod eye is only allowed to turn 0-180 degrees anti-clockwise.

Back fixtures

Option "1" and "A"

LINAK P/N: 0251011 without bushings, zinc-coated steel



LINAK P/N: 0251015 without bushings, AISI 304

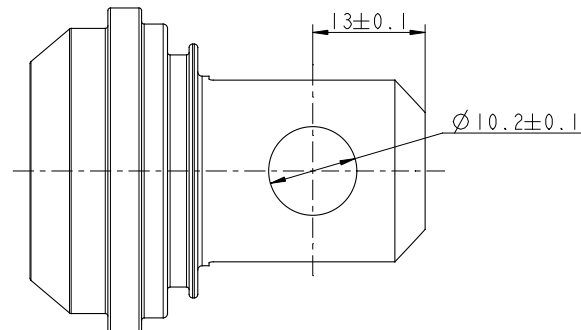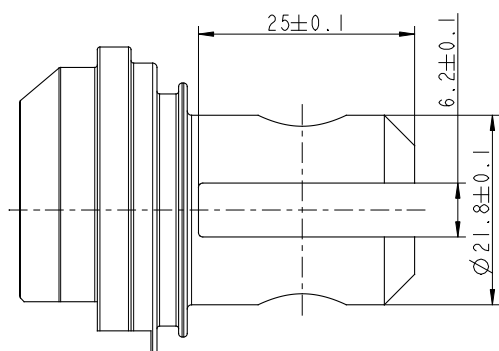

Option "2" and "B"

LINAK P/N: 0251010 with bushings, zinc-coated steel



LINAK P/N: 0251014 with bushings, AISI 304

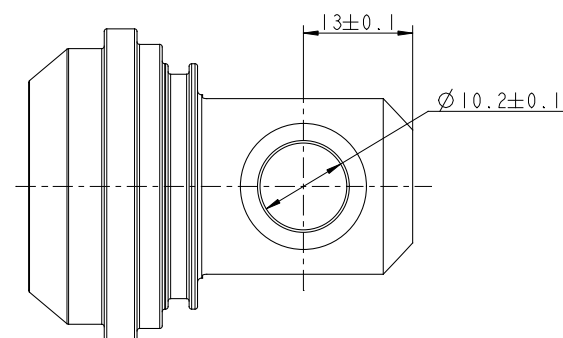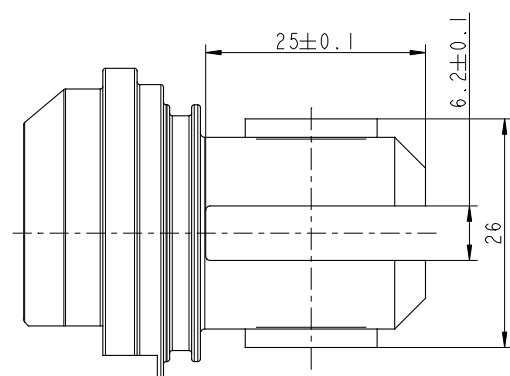

Option "3" and "C"

LINAK P/N: 0251010 without bushings, zinc-coated steel



LINAK P/N: 0251014 without bushings, AISI 304

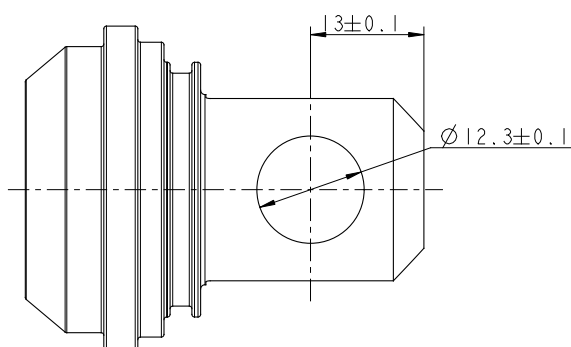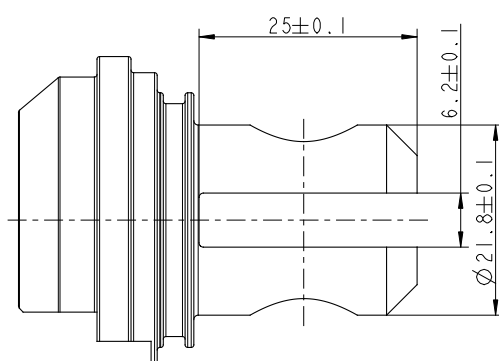

Back fixtures

Option "4" and "D"



LINAK P/N: 0251011 with bushings, zinc-coated steel

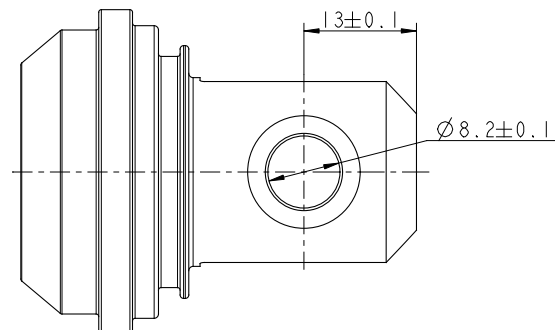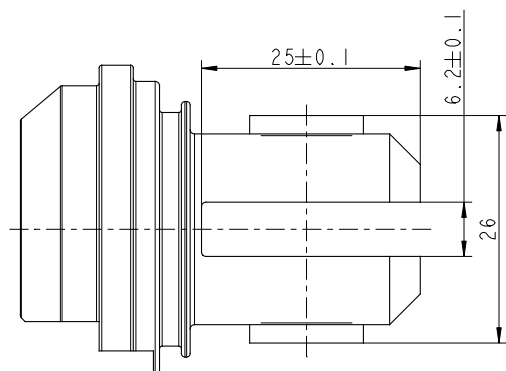

Option "5" and "F"

LINAK P/N: 0251032 without bushings, zinc-coated steel



LINAK P/N: 0251034 without bushings, AISI 304

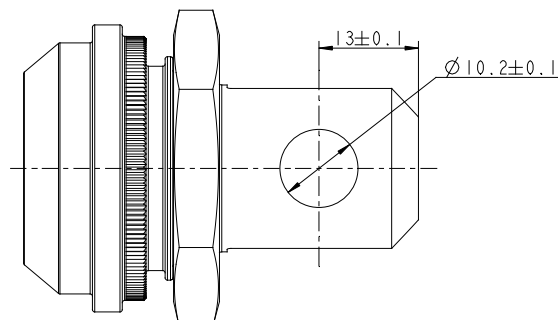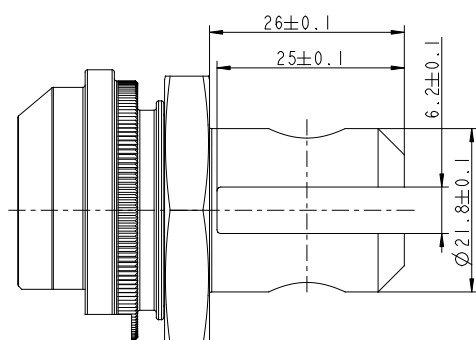

Option "6" and "G"

LINAK P/N: 0251026 with bushings, zinc-coated steel

LINAK P/N: 0251033 with bushings, AISI 304

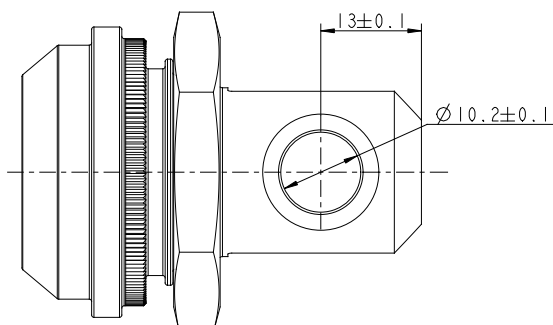
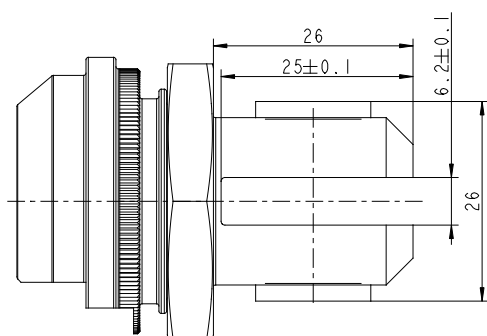


Back fixtures

Option "7" and "H"

LINAK P/N: 0251026 without bushings, zinc-coated steel



LINAK P/N: 0251033 without bushings, AISI 304

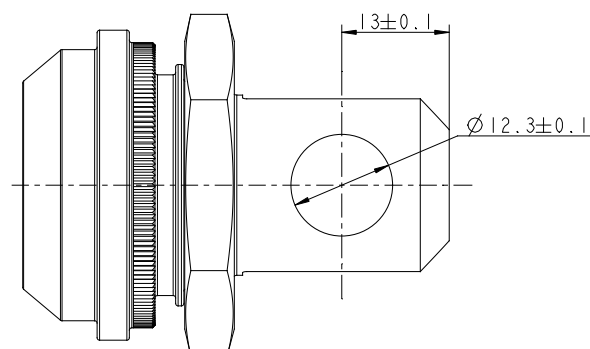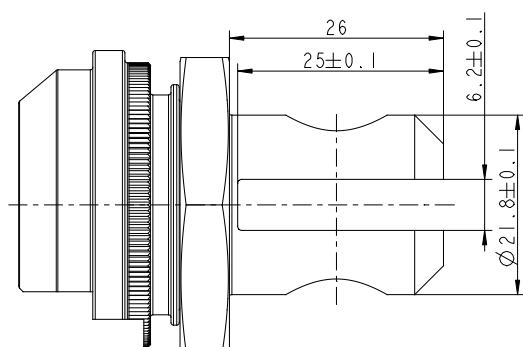

Option "8" and "I"



LINAK P/N: 0251032 with bushings, zinc-coated steel

LINAK P/N: 0251034 with bushings, AISI 304

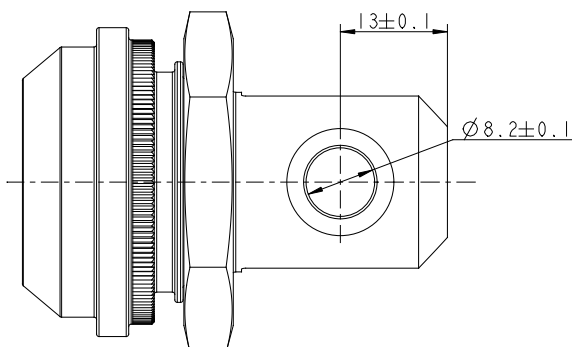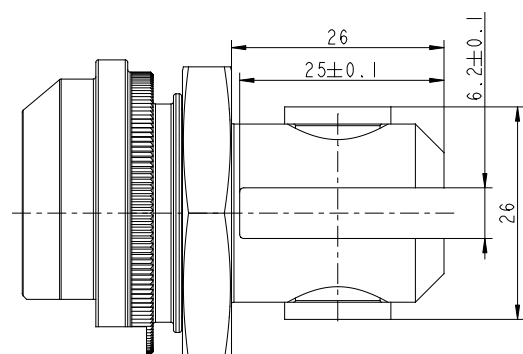


Option "M"


LINAK P/N: 0251021, AISI 303

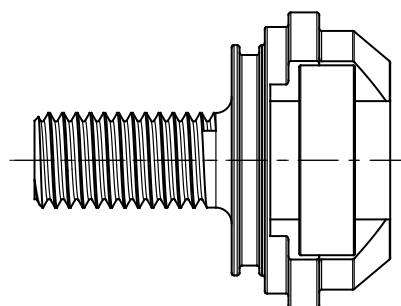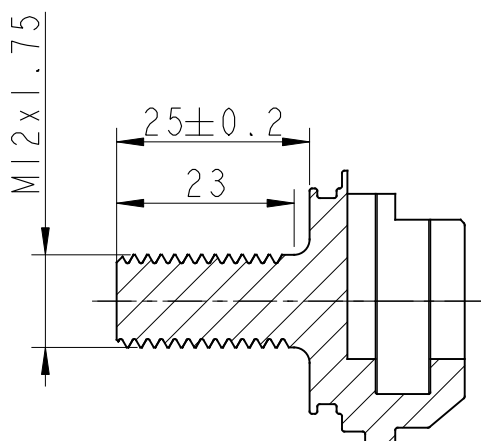

Back fixture orientation

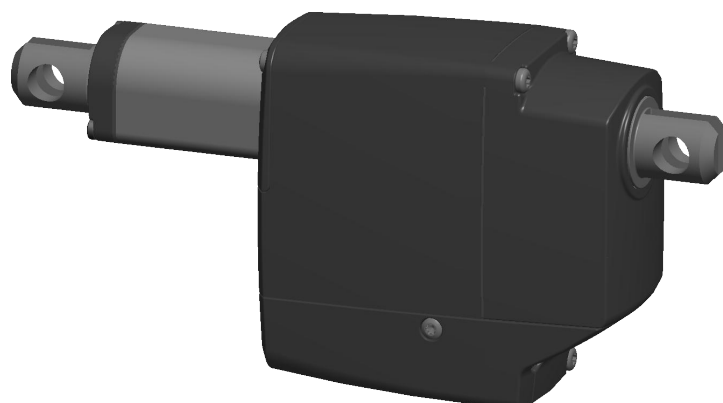


"0" Degrees

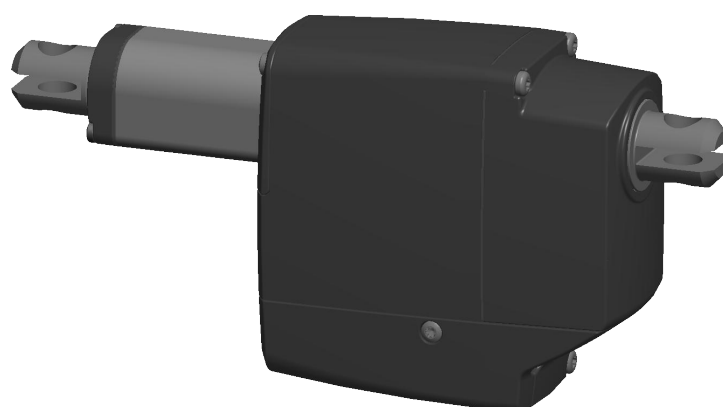


"90" Degrees

NB. All with tolerance of $\pm 4^\circ$


Cable mounting

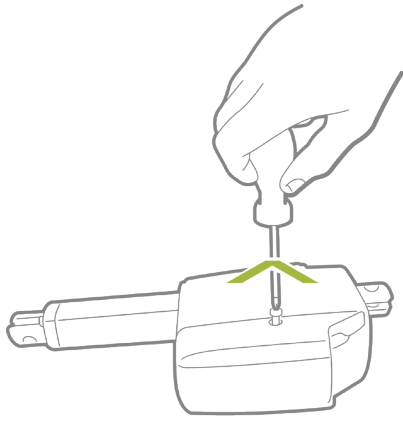


1. Unscrew the cover

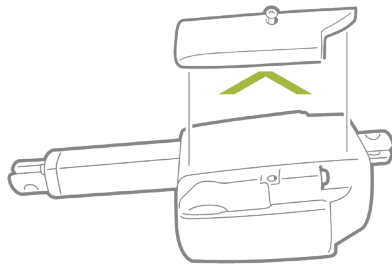

2. Remove the cover and blind plug

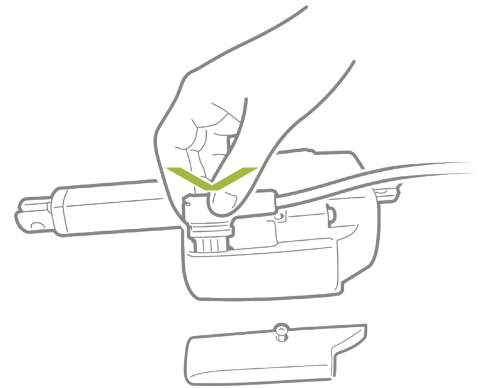


3. Plug in the cable gently without using any tools

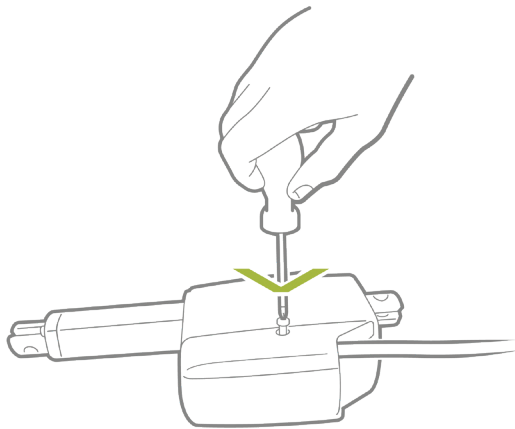

4. Screw the cover back onto the actuator

The torque of the cover screw is approx. 1.5 Nm

Removing cables

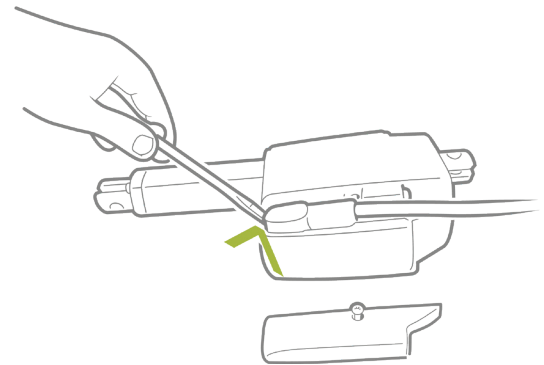

5. Use a screwdriver to pull up the cable



When changing the cables on a LINAK® actuator, it is important that this is done carefully, in order to protect the plugs and pins. Before the new cable is mounted, we recommend that the socket is greased with Vaseline®, to keep the high IP protection and ensure an easy mounting. Please be sure that the plug is in the right location and fully pressed in before the cable lid is mounted.

Please note that if the cables are mounted and dismantled more than 3 times the plugs can be damaged. Therefore, we recommend that such cables are discarded and replaced.

Also note that the cables should not be used for carrying the actuator.

We recommend to take some precaution and design the wire connection in a way, where the cable end is kept inside a closed, protected area to guarantee the high IP protection.




NOT valid for ATEX cables, please refer to the ATEX section for correct cable mounting on ATEX actuators.

Cables




Power + signal cable dimensions

LINAK P/N: 0147032 (Only for Standard actuators)

Colour	Outer dimensions	Core mm ²	AWG
Brown	Ø1.8 mm	1.0	18
Blue	Ø1.8 mm	1.0	18
Violet	Ø1.8 mm	1.0	18
Black	Ø1.8 mm	1.0	18
Red	Ø1.8 mm	1.0	18
Yellow	Ø1.8 mm	1.0	18
Green	Ø1.8 mm	1.0	18
White	Ø1.8 mm	1.0	18

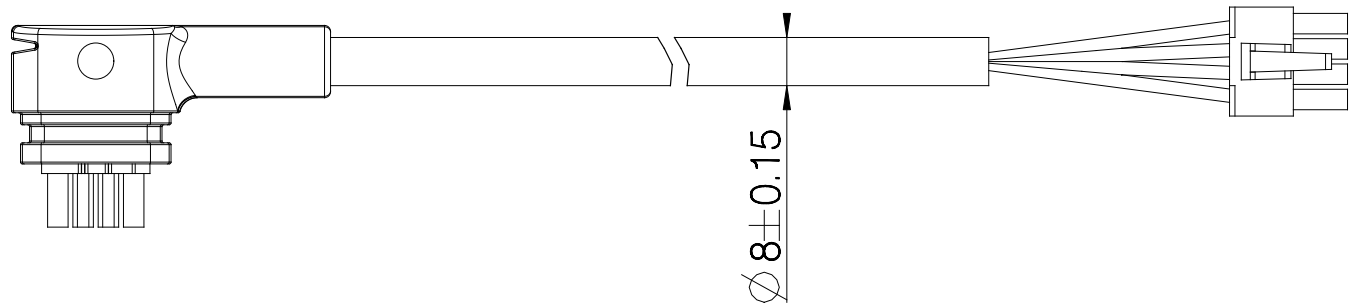

8-pin connector cable item numbers

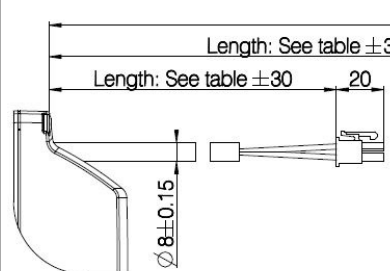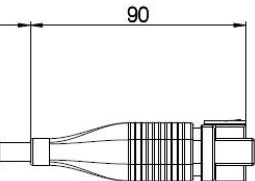Connector		C		J/K		I/L	
							
Ordering no.	LINAK P/N	Length (mm)		Length (mm)		Length (mm)	
S	0147001 - 850	CS	810	JS/KS	785	IS/LS	740
T	0147001 - 1600	CT	1560	JT/KT	1535	IT/LT	1490
R	0147001 - 5100	CR	4960	JR/KR	4935	IR/LR	4890
V	0147001 - 10100	CV	10060	JV/KV	10035	IV/LV	9990


*AWG: American Wire Gauge

Cables

Power + signal cable dimensions

LINAK P/N: 0257057 (Only for actuators with I/O, CAN bus J1939, CANopen, IO-Link Parallel and Modbus RTU Parallel)

Colour	Outer dimensions	Core mm ²	AWG
Grey	Ø1.5 mm	0.5	20
Light Blue	Ø1.5 mm	0.5	20
Yellow	Ø1.5 mm	0.5	20
Red	Ø1.5 mm	0.5	20
White	Ø1.5 mm	0.5	20
Violet	Ø1.5 mm	0.5	20
Orange	Ø1.5 mm	0.5	20
Green	Ø1.5 mm	0.5	20
Black	Ø1.5 mm	0.5	20
Blue	Ø1.8 mm	1	18
Brown	Ø1.8 mm	1	18

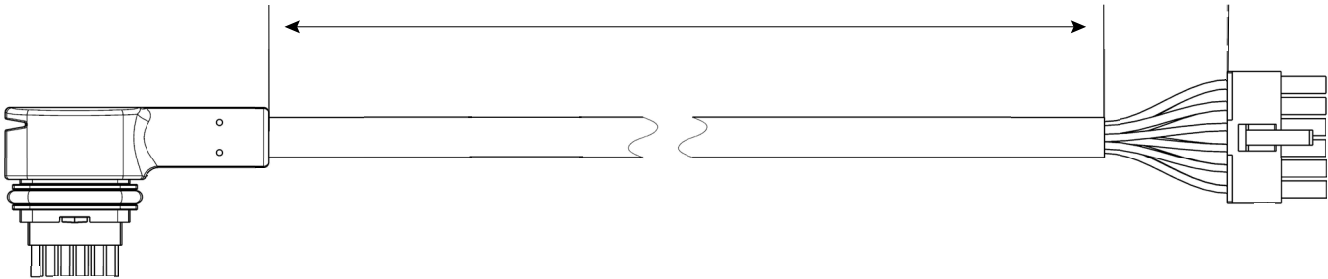

12-pin connector cable item numbers


Cable P/N Table				
Ordering no.	LINAK P/N	Cable type	# Wires	Length in mm
Y	0257057 - 1600	Power + signal	11	1600 ± 30
Z	0257057 - 5100	Power + signal	11	5100 ± 50

Cables

Power + signal cable dimensions

LINAK P/N: 0257077 (Only for actuators with IO-Link)

Colour	Outer dimensions	Core mm ²	AWG
J1			
Grey	Ø1.5 mm	0.5	20
Light Blue	Ø1.5 mm	0.5	20
Yellow	Ø1.5 mm	0.5	20
Red	Ø1.5 mm	0.5	20
White	Ø1.5 mm	0.5	20
Violet	Ø1.5 mm	0.5	20
Orange	Ø1.5 mm	0.5	20
Green	Ø1.5 mm	0.5	20
Black	Ø1.5 mm	0.5	20
Blue	Ø1.8 mm	1	18
Brown	Ø1.8 mm	1	18
J2			
Grey	Ø1.8 mm	1	18
Light Blue	Ø1.8 mm	1	18
Orange	Ø1.8 mm	1	18
J3			
18Blue	Ø1.8 mm	1	18
Brown	Ø1.8 mm	1	18

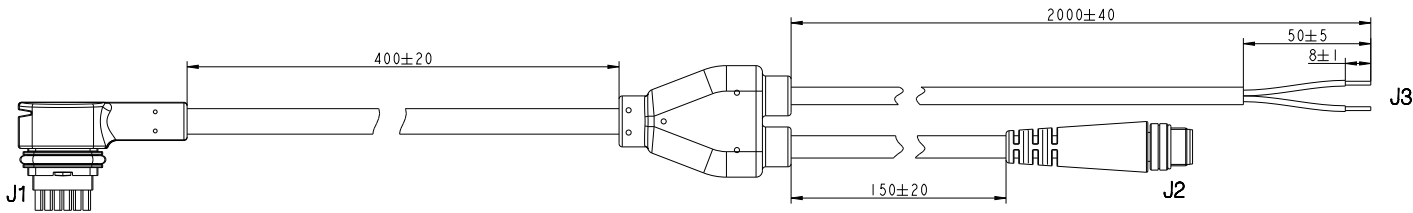


Cables

Power + signal cable dimensions

LINAK P/N: 0257078 (Only for actuators with Modbus RTU)

Colour	Outer dimensions	Core mm ²	AWG
J1			
Grey	Ø1.5 mm	0.5	20
Light Blue	Ø1.5 mm	0.5	20
Yellow	Ø1.5 mm	0.5	20
Red	Ø1.5 mm	0.5	20
White	Ø1.5 mm	0.5	20
Violet	Ø1.5 mm	0.5	20
Orange	Ø1.5 mm	0.5	20
Green	Ø1.5 mm	0.5	20
Black	Ø1.5 mm	0.5	20
Blue	Ø1.8 mm	1	18
Brown	Ø1.8 mm	1	18
J2			
Light Blue	Ø1.8 mm	0.34	22
Yellow	Ø1.8 mm	0.34	22
Red	Ø1.8 mm	0.34	22
Green	Ø1.8 mm	0.34	22
Black	Ø1.8 mm	0.34	22
J3			
Blue	Ø1.8 mm	1	18
Brown	Ø1.8 mm	1	18

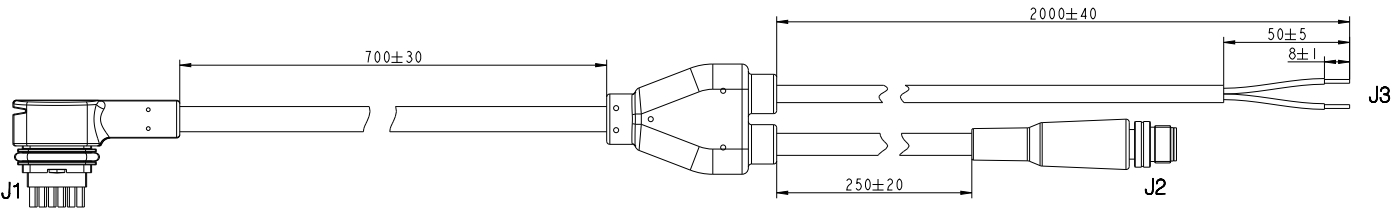


Cables

Power + signal cable dimensions

LINAK P/N: 0257079 (Only for actuators with Ethernet/IP)

Colour	Outer dimensions	Core mm ²	AWG
J1			
Grey	Ø1.5 mm	0.5	20
Light Blue	Ø1.5 mm	0.5	20
Yellow	Ø1.5 mm	0.5	20
Red	Ø1.5 mm	0.5	20
White	Ø1.5 mm	0.5	20
Violet	Ø1.5 mm	0.5	20
Orange	Ø1.5 mm	0.5	20
Green	Ø1.5 mm	0.5	20
Black	Ø1.5 mm	0.5	20
Blue	Ø1.8 mm	1	18
Brown	Ø1.8 mm	1	18
J2			
Grey	Ø1.8 mm	0.4	26
Light Blue	Ø1.8 mm	0.4	26
Yellow	Ø1.8 mm	0.4	26
Green	Ø1.8 mm	0.4	26
J3			
Red	Ø1.8 mm	0.4	26
White	Ø1.8 mm	0.4	26
Violet	Ø1.8 mm	0.4	26
Orange	Ø1.8 mm	0.4	26
Black	Ø1.8 mm	0.4	26
J4			
Blue	Ø1.8 mm	1	18
Brown	Ø1.8 mm	1	18

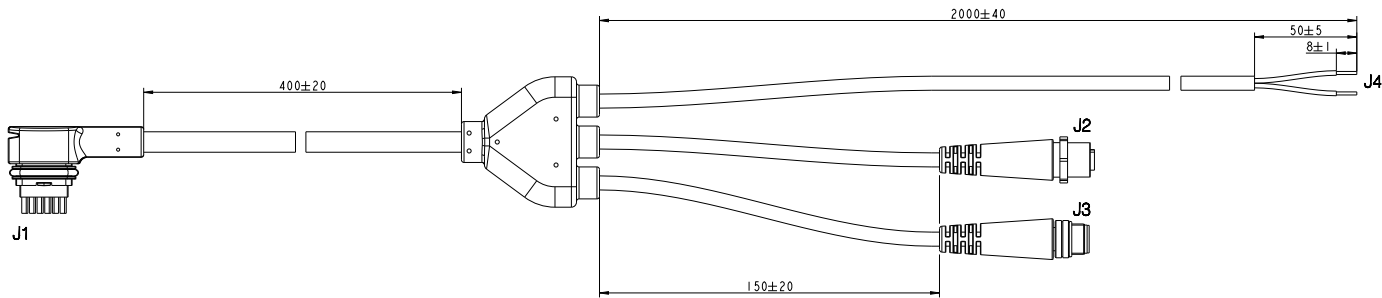

Electrical installation



- To ensure maximum self-locking ability, please be sure that the motor is shorted when stopped. Actuators with integrated controller provide this feature, as long as the actuator is powered.
- When using soft stop on a DC-motor, a short peak of higher voltage will be sent back towards the power supply. It is important when selecting the power supply that it does not turn off the output, when this backwards load dump occurs.
- When using actuators without integrated controller, it is strongly recommended to use a fuse between power supply and actuator.



The power supply for actuators without integrated controller must be monitored externally and cut off in case of current overload.

Environmental tests – Climatic

Test	Specification	Comment
Cold test	EN60068-2-1 (Ab)	Storage at low temperature: Temperature: - 40°C Duration: 72 h Actuator is not connected/operated Tested at room temperature
		Storage at low temperature: Temperature: -55°C Duration: 24 h Actuator is not connected Tested at room temperature
	EN60068-2-1 (Ad)	Operating at low temperature: Temperature: -40°C Duration: 4 h Tested at room temperature within 5 minutes overload
Dry heat	EN60068-2-2 (Bb)	Storage at high temperature: Temperature: +85°C Duration: 72 h Actuator is not connected/operated Tested at room temperature
	EN60068-2-2 (Bb)	Storage at low temperature: Temperature: +105°C Duration: 24 h Actuator operated at high temperature
Damp heat	EN60068-2-30 (Db)	Damp heat, Cyclic: Relative humidity: 93-98% High temperature: +55°C in 12 hours Low temperature: +25°C in 12 hours Duration: 21 cycles * 24 hours Actuator is operated during test
Salt mist	EN ISO 9227	Dynamic salt spray test: Salt solution: 5% sodium chloride (NaCl) Temperature: 35 ± 2°C Duration: 500 h Actuator is operated
Thermal shock		Dunk test: Actuator is heated to +85°C for 4 h and submerged into a 0°C cold salt-water-detergent solution for 2 h Followed by 18 h dry time Duration: 5 cycles

Environmental tests – Climatic

Test	Specification	Comment
Degrees of protection	EN60529 - IP66	IP6X - Dust: Dust-tight - no ingress of dust Actuator is not activated
	EN60529 - IP66	IPX6 - Water: Ingress of water in quantities causing harmful effects is not allowed Duration: 100 litres pr. minute for 3 minutes Actuator is not activated
	DIN40050 - IP69K	IPX9K: High pressure cleaner Temperature: +80°C Water pressure: 80-100 bar Water flow: 14-16 l/min Duration: 30 seconds each at 4 different angles: 0°, 30°, 60° and 90° Actuator is not activated Ingress of water in quantities causing harmful effects is not allowed
Rain		Dynamic rain test: Actuators exposed to continuous rain Actuators operated and sideloaded with 5 N Duration: 10.000 cycles and 240 h

Environmental tests – Mechanical

Test	Specification	Comment
Mechanical shock (handling) - drop test		3 drops on 6 faces onto a concrete floor Drop height: 500 mm on all surfaces
Mechanical shock operational		Peak Pulse Amplitude: 50 G Pulse Duration: 11 ms Number of pulses: 18 total - 3 in each direction for all three axes
		Peak Pulse Amplitude: 30 G Pulse Duration: 18 ms Number of pulses: 18 total - 3 in each direction for all three axes
		Peak Pulse Amplitude: 25 G Pulse Duration: 6 ms Number of pulses: 6000 total- 1000 in each direction for all three axes
Vibration random		Random vibration: From 18 Hz - 0,025 G to 1000 Hz - 0,015 G Duration: 2 h/axis UM-32-30-003

Environmental tests - Electrical

Standard	Specification	FOCUS ON
2004/104/EC	Automotive EMC Directive 2004/104/EC on electrical and electronic car components	<ul style="list-style-type: none"> VEHICLES AND MOBILITY
EN/IEC 60204-1: 2006 +A1: 2009	Safety of machinery - Electrical equipment of machines - Part 1: General requirements	<ul style="list-style-type: none"> INDUSTRIAL AUTOMATION
EN/IEC 60204 -32: 2008	Safety of machinery - Electrical equipment of machines - Part 32: Requirements for hoisting machines	<ul style="list-style-type: none"> INDUSTRIAL AUTOMATION PLATFORMS AND LIFTS
EN/IEC 61000-6-1: 2007	Electromagnetic compatibility (EMC) - Part 6-1: Generic standards - Immunity for industrial environments	<ul style="list-style-type: none"> INDUSTRIAL AUTOMATION
EN/IEC 61000-6-2: 2005	Electromagnetic compatibility (EMC) - Part 6-2: Generic standards - Immunity for industrial environments	<ul style="list-style-type: none"> INDUSTRIAL AUTOMATION
EN/IEC 61000-6-3: 2007 + A1:2011	Electromagnetic compatibility (EMC) - Part 6-3: Generic standards - Emission standard for residential, commercial and light-industrial environments	<ul style="list-style-type: none"> INDUSTRIAL AUTOMATION
EN/IEC 61000-6-4: 2007 + A1:2011	Electromagnetic compatibility (EMC) - Part 6: Generic standards - Section 4: Emission standard for industrial environments	<ul style="list-style-type: none"> INDUSTRIAL AUTOMATION
EN 13309: 2010	Construction machinery	<ul style="list-style-type: none"> CONSTRUCTION
EN/ISO 13766: 2006	Earth-moving machinery - Electromagnetic compatibility	<ul style="list-style-type: none"> CONSTRUCTION
EN/ISO 14982: 2009	Agricultural and forestry machines - Electromagnetic compatibility	<ul style="list-style-type: none"> MOBILE AGRICULTURE OUTDOOR POWER EQUIPMENT
EU recreational crafts directive 94/25/EC		
IECEx / ATEX (Ex)	EN60079-0:2012 EN60079-31:2014 This Ex certification allows the actuator to be mounted in Ex dust areas: II 2D Ex tb IIIC T135°C Db Tamb -25°C to +65°C	
CCC Ex	CNCA-C23-01:2024 GB/T 3836.1-2021 GB/T 3836.31-2021	

Non-complying standards

Standard	Explanation
IEC 60601-1	Please note that this product cannot be approved according to the medical electrical equipment standard. Due to the combination of the aluminium cast housing and the embedded PCB, we do not fulfil the regulations according to leakage current.

FACTORIES

Denmark - Headquarters

LINAK A/S

Phone: +45 73 15 15 15
Fax: +45 74 45 80 48
Fax (Sales): +45 73 15 16 13
Web: www.linak.com

China

LINAK (Shenzhen) Actuator Systems, Ltd.

Phone: +86 755 8610 6656
Phone: +86 755 8610 6990
Web: www.linak.cn

Slovakia

LINAK Slovakia s.r.o.

Phone: +421 51 7563 444
Web: www.linak.sk

Thailand

LINAK APAC Ltd.

Phone: +66 33 265 400
Web: www.linak.com

USA

LINAK U.S. Inc.

Americas Headquarters

Phone: +1 502 253 5595
Fax: +1 502 253 5596
Web: www.linak-us.com
www.linak-latinamerica.com

SUBSIDIARIES

Australia

LINAK Australia Pty. Ltd

Phone: +61 3 8796 9777
Fax: +61 3 8796 9778
E-mail: sales@linak.com.au
Web: www.linak.com.au

Austria

LINAK Zweigniederlassung - Österreich (Wien)

Phone: +43 (1) 890 7446
Fax: +43 (1) 890 744615
E-mail: info@linak.de
Web: www.linak.at - www.linak.hu

Belgium

LINAK Actuator-Systems NV/SA

(Belgium & Luxembourg)
Phone: +32 (0)9 230 01 09
E-mail: beinfo@linak.be
Web: www.linak.be - www.fr.linak.be

Brazil

LINAK Do Brasil Comércio De Atuadores Ltda.

Phone: +55 (11) 2832 7070
Fax: +55 (11) 2832 7060
E-mail: info@linak.com.br
Web: www.linak.com.br

Canada

LINAK Canada Inc.

Phone: +1 502 253 5595
Fax: +1 416 255 7720
E-mail: info@linak.ca
Web: www.linak-us.com

Czech Republic

LINAK C&S s.r.o.

Phone: +42 058 174 1814
Fax: +42 058 170 2452
E-mail: info@linak.cz
Web: www.linak.cz - www.linak.sk

Denmark - International

LINAK International

Phone: +45 73 15 15 15
E-mail: info@linak.com
Web: www.linak.com

Denmark - Sales

LINAK Danmark A/S

Phone: +45 86 80 36 11
Fax: +45 86 82 90 51
E-mail: linak@linak-silkeborg.dk
Web: www.linak.dk

Finland

LINAK OY

Phone: +358 10 841 8700
E-mail: linak@linak.fi
Web: www.linak.fi

France

LINAK France E.U.R.L

Phone: +33 (0) 2 41 36 34 34
Fax: +33 (0) 2 41 36 35 00
E-mail: linak@linak.fr
Web: www.linak.fr

Germany

LINAK GmbH

Phone: +49 6043 9655 0
Fax: +49 6043 9655 60
E-mail: info@linak.de
Web: www.linak.de

India

LINAK A/S India Liaison Office

Phone: +91 120 4531797
Fax: +91 120 4786428
E-mail: info@linak.in
Web: www.linak.in

Ireland

LINAK UK Limited (Ireland)

Phone: +44 (0)121 544 2211
Fax: +44 (0)121 544 2552
+44 (0)796 855 1606 (UK Mobile)
+35 387 634 6554 (Rep.of Ireland Mobile)
E-mail: sales@linak.co.uk
Web: www.linak.co.uk

Italy

LINAK ITALIA S.r.l.

Phone: +39 02 48 46 33 66
Fax: +39 02 48 46 82 52
E-mail: info@linak.it
Web: www.linak.it

Japan

LINAK K.K.

Phone: 81-45-533-0802
Fax: 81-45-533-0803
E-mail: linak@linak.jp
Web: www.linak.jp

Malaysia

LINAK Actuators Sdn. Bhd.

Phone: +60 4 210 6500
Fax: +60 4 226 8901
E-mail: info@linak-asia.com
Web: www.linak.my

Netherlands

LINAK Actuator-Systems B.V.

Phone: +31 76 5 42 44 40 /
+31 76 200 11 10
E-mail: info@linak.nl
Web: www.linak.nl

New Zealand

LINAK New Zealand Ltd

Phone: +64 9580 2071
Fax: +64 9580 2072
E-mail: nzsales@linak.com.au
Web: www.linak.com.au

Norway

LINAK Norge AS

Phone: +47 32 82 90 90
E-mail: info@linak.no
Web: www.linak.no

Poland

LINAK Polska

LINAK Danmark A/S (Spółka Akcyjna)
Phone: +48 22 295 09 70 /
+48 22 295 09 71
E-mail: info@linak.pl
Web: www.linak.pl

Republic of Korea

LINAK Korea Ltd.

Phone: +82 2 6231 1515
Fax: +82 2 6231 1516
E-mail: info@linak.kr
Web: www.linak.kr

Slovakia

LINAK Slovakia S.R.O.

Phone: +421 51 7563 444
Web: www.linak.sk

Spain

LINAK Actuadores, S.L.u

Phone: +34 93 588 27 77
Fax: +34 93 588 27 85
E-mail: esma@linak.es
Web: www.linak.es

Sweden

LINAK Scandinavia AB

Phone: +46 8 732 20 00
Fax: +46 8 732 20 50
E-mail: info@linak.se
Web: www.linak.se

Switzerland

LINAK AG

Phone: +41 43 388 31 88
Fax: +41 43 388 31 87
E-mail: info@linak.ch
Web: www.linak.ch - www.fr.linak.ch
www.it.linak.ch

Taiwan

LINAK (Shenzhen) Actuator systems Ltd.

Taiwan Representative office

Phone: +886 2 272 90068
Fax: +886 2 272 90096
E-mail: sales@linak.com.tw
Web: www.linak.com.tw

Turkey

LINAK İhr. San. ve Tic. A.Ş.

Phone: +90 312 4726338
Fax: +90 312 4726635
E-mail: info@linak.com.tr
Web: www.linak.com.tr

United Kingdom

LINAK UK Limited

Phone: +44 (0)121 544 2211
Fax: +44 (0)121 544 2552
E-mail: sales@linak.co.uk
Web: www.linak.co.uk

DISTRIBUTORS

Argentina

Novotec Argentina SRL

Phone: 011-4303-8989 / 8900
Fax: 011-4032-0184
E-mail: info@novotecargentina.com
Web: www.novotecargentina.com

Colombia

MEM Ltda

Phone: +[57] (1) 334-7666
Fax: +[57] (1) 282-1684
E-mail: servicioalcliente@memltda.com.co
Web: www.mem.net.co

India

Mechatronics Control Equipments India Pvt Ltd

Phone: +91-44-28558484, 85
E-mail: bala@mechatronicscontrol.com
Web: www.mechatronicscontrol.com

Indonesia

PT. Himalaya Everest Jaya

Phone: +6 221 544 8956 /+6 221 544 8965
Fax: +6 221 619 1925
Fax (Sales): +6 221 619 4658
E-mail: hejplastic-div@centrin.net.id
www.hej.co.id

Israel

NetivTech LTD

Phone: +972 55-2266-535
Fax: +972 2-9900-560
Email: info@NetivTech.com
Web: www.netivtech.com

Singapore

Servo Dynamics Pte Ltd

Phone: +65 6844 0288
Fax: +65 6844 0070
E-mail: servodynamics@servo.com.sg

South Africa

Industrial Specialised Applications CC

Phone: +27 011 466 0346
E-mail: gartht@isagroup.co.za
Web: www.isaza.co.za

United Arab Emirates

Mechatronics

Phone: +971 4 267 4311
Fax: +971 4 267 4312
E-mail: mechtron@emirates.net.ae

Terms of use

LINAK® takes great care in providing accurate and up-to-date information on its products. However, the user is responsible for determining the suitability of LINAK products for a specific application. Due to continual development, LINAK products are subject to frequent modifications and changes. LINAK reserves the rights to conduct modifications, updates, and changes without any prior notice. For the same reason, LINAK cannot guarantee the correctness and actual status of imprinted information on its products.

LINAK uses its best efforts to fulfil orders. However, for the reasons mentioned above, LINAK cannot guarantee availability of any particular product at any given time. LINAK reserves the right to discontinue the sale of any product displayed on its website or listed in its catalogues or in other written material created and produced by LINAK, LINAK subsidiaries, or LINAK affiliates. All sales are subject to the 'Standard Terms of Sale and Delivery for LINAK A/S' available on LINAK websites. LINAK and the LINAK logotype are registered trademarks of LINAK A/S. All rights reserved.