

Lifting Column BL1
Data sheet

BL1

The BL1 is a 3-part lifting column designed to be used for example in hospital beds, nursing home beds, treatment chairs, couches and dental chairs.

The lifting column is compact and has a long stroke length. The 3-part guidance enables an overlap between the individual profiles, which ensures a high degree of stability.

The lifting column has an open spindle actuator with a chain drive inside which is practically noiseless.

The BL1 is available with a cable integrated inside the column which enables connection of a hand control or a foot switch from the top or bottom of the column. Hereby the cables are hidden inside the column. It is possible to connect the control unit and motor cable at the top plate but only motor cable or control unit at the bottom plate. The integrated cable makes the column easy to fit into an aesthetic design of applications and easy to clean.

Among benefits are:

- Short installation dimension and long stroke length is possible
- High degree of stability
- Low noise level
- Exchangeable cables



Features & Options:

- Load in push: 2000 N
- Colour: Anodised aluminium
- Protection class: IPX6
- Motor: 24 V DC, 12 V DC
- Built-in dimensions:
 - Standard: 350 mm (+/-4) - stroke length 200 mm, 300 mm, 400 mm (+/-3)
 - Medium: 312 mm (+/-4) - stroke length 324 mm (+/-3)
 - Small: 274 mm (+/-4) - stroke length 248 mm (+/-3)
- Positioning options: Dual hall
- Noise level: 50 dB (A) (At rated voltage and with no load in accordance with EN ISO 3743-1)
- Safety nut: Optional
- Built-in electrical limit switch: Yes
- Exchangeable cable: Minit - minifit for the motor cable and 10 poled modular plug for hand control or foot switch
- Safety factor: >2.5
- Weight: BL1 Standard: 9.8 kg
BL1 Medium: 8.7 kg
BL1 Small: 8.0 kg

- Static bending moment: 500 Nm
- Dynamic bending moment: 250 Nm
- Protective grounding cable: Optional, for potential equalization between top- and bottom plate
- Connection of motor cable: Standard top plate or optional bottom plate
- Connection of control cable: Optional as cable through

Usage:

- Duty cycle: 10%, 2 minutes continuous use followed by 18 minutes not in use
- Usage temperature: + 5 °C to + 40 °C
- Storage temperature: Max 50 °C
- Compatibility: CB6 OBL, CB6 OBF, CB16 and CB20
- Approvals: IEC60601-1, ANSI/AAMI ES60601-1, CAN/CSA-22.2 No 60601-1, IEC 60601-1-6, IEC 60601-1-2

Technical specifications:


Motor type	Spindle pitch (mm)	Push max. (N)	Pull max. (N)	Self-lock min. (N)	Bending moment max. (static) (Nm)	Bending moment max. (dynamic) (Nm)	Built-in-dimension (mm)	Stroke length (mm)	Max. Static pull (N)		
24V	4	2000	0	2000	200 mm stroke = 1000 248 mm stroke = 500 300 mm stroke = 750 324 mm stroke = 500 400 mm stroke = 500	250	350	400	1000		
12V								300			
								200			
							312	324			
							274	248			
							350	400			
	300										
200											
312	324										
274	248										
9	700	0	700	700			700	700	350	400	700
										300	
					200						
					312	324					
					274	248					

Motor type	Spindle pitch (mm)	Typical speed 0 / full load (CB6 / CB16 OBL) (mm/s)		Typical speed 0 / full load (CB6 / CB16 OBF) (mm/s)		Typical speed 0 / full load (CB20) (mm/s)		Stroke (mm)	Typical current at full load 24V (A)
24V	4	18	9	19	10	19	12	248	4.8 - 5
								324	4.0 - 4.4
								400	3.8 - 4.2

Motor type	Spindle pitch (mm)	Typical speed 0 / full load (12V stabilized power supply) (mm/s)		Typical current at full load 12V (A)
12V	4	21	12	9
	9	46	24	7

BL1

Ordering example:

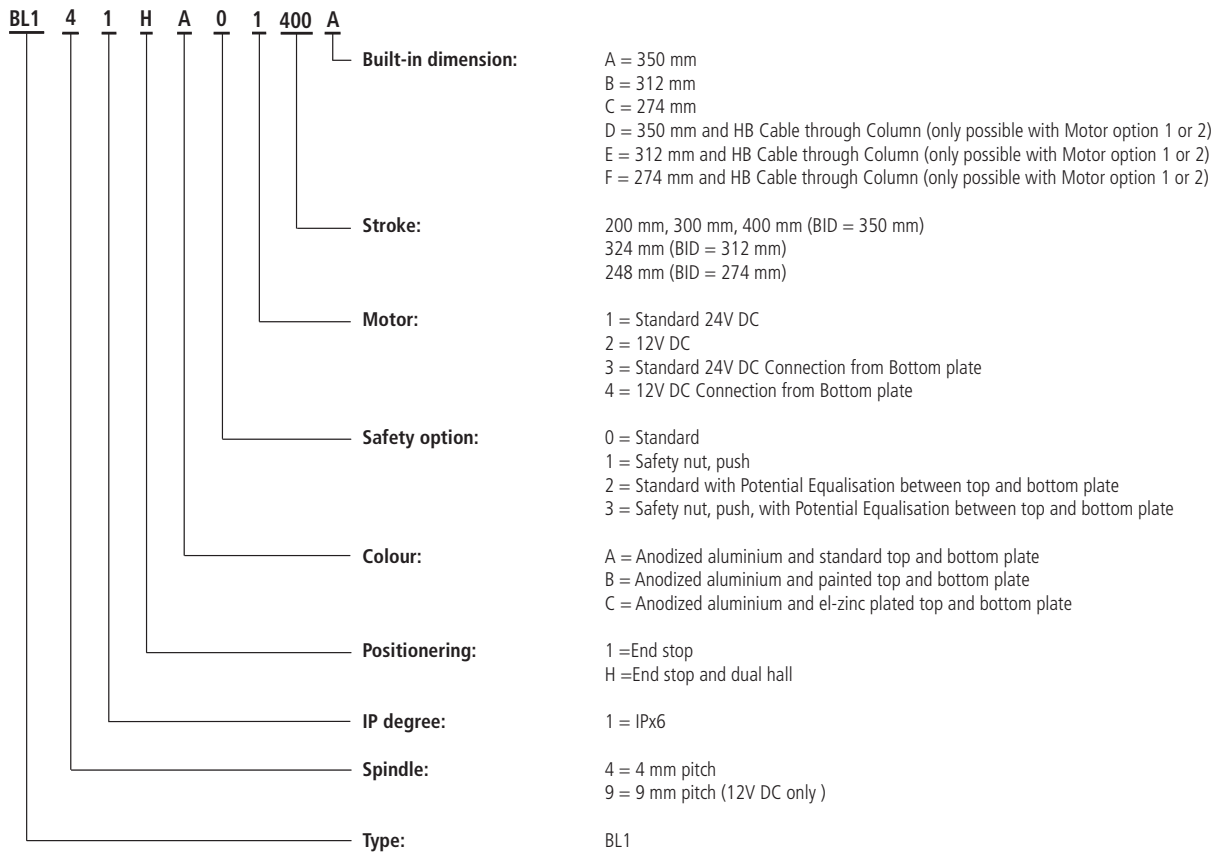

Blind plugs for the top plate are included if the motor option 3 or 4 is chosen


Options - top plate connections:

- Motor cable and hand control cable
- Motor cable
- No connections (motor cable in the bottom plate)




Options - bottom plate connections:

- Motor cable
- Hand control cable
- No connections (motor cable in the top plate)

Dimensions:

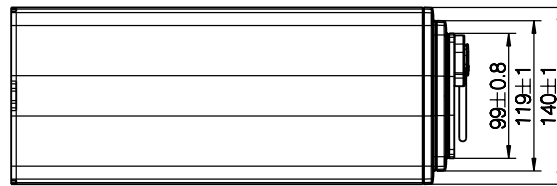



BID	L (mm)
A	350 ± 4
B	312 ± 4
C	274 ± 4

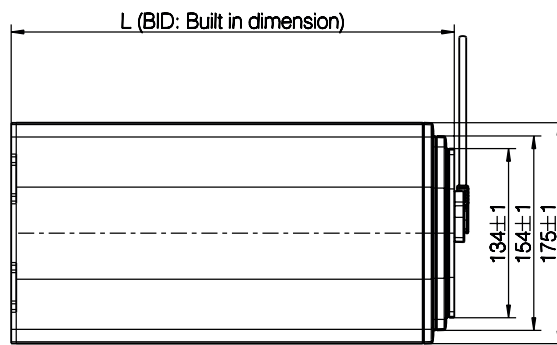




Drawing no.: 0807000

Dimensions - BL1 with cable through:

BID	L (mm)
D	350 ± 4
E	312 ± 4
F	274 ± 4

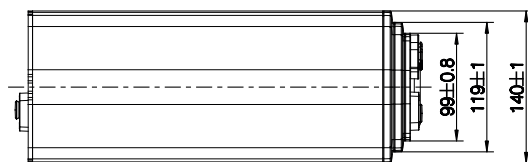

Motor cable

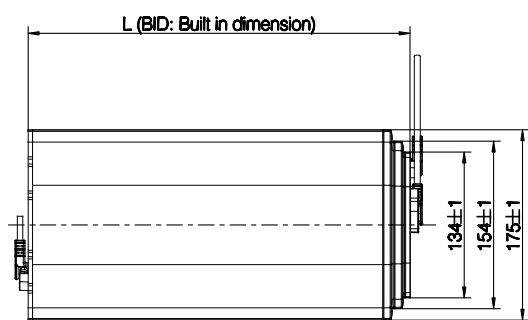

Hand control cable

Drawing no.: 0807001, 0807002-A

Terms of use

The user is responsible for determining the suitability of LINAK products for specific application. LINAK takes great care in providing accurate and up-to-date information on its products.

However, due to continuous development in order to improve its products, LINAK products are subject to frequent modifications and changes without prior notice. Therefore, LINAK cannot guarantee the correct and actual status of said information on its products.

While LINAK uses its best efforts to fulfill orders, LINAK cannot, for the same reasons as mentioned above, guarantee the availability of any particular product. Therefore, LINAK reserves the right to discontinue the sale of any product displayed on its website or listed in its catalogues or other written material drawn up by LINAK.

All sales are subject to the Standard Terms of Sale and Delivery for LINAK. For a copy hereof, please contact LINAK.