TECHLINE

Actuator LA25 Without feedback


Connection diagram



LINAK.COM/TECHLINE


Connection diagram

25XXXXXXX000X0X=XXXXX00XXXXXX

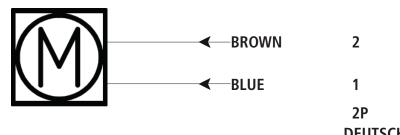

Compliant with:





Standard connector front view

I/O Specifications

Input/Output	Specification	Comments
Description	Permanent magnetic DC motor.	M
Brown	12-24 VDC (+/-) 12 V ± 20%	To extend actuator: Connect Brown to positive To retract actuator:
Blue	24 V ± 10% Under normal conditions: 12 V, 5 A at max load 24 V, 2.5 A at max load	Connect Brown to negative To extend actuator: Connect Blue to negative To retract actuator: Connect Blue to positive
Red Black	Not to be connected	
Green	Not to be connected	
Yellow Violet	Not to be connected Not to be connected	
White	Not to be connected	

Terms of use The user is responsible for determining the suitability of LINAK products for specific application. LINAK takes great care in providing accurate and up-to-date information on its products. However, due to continuous development in order to improve its products, LINAK products are subject to frequent modifications and changes without prior notice. Therefore, LINAK cannot guarantee the correct and actual status of said information on its products. While LINAK uses its best efforts to fulfil orders, LINAK cannot, for the same reasons as mentioned above, guarantee the availability of any particular product. Therefore, LINAK cannot subject to discontinue the sale of any product displayed on its website or listed in its catalogues or other written material drawn up by LINAK. All sales are subject to the Standard Terms of Sale and Delivery for LINAK. For a copy hereof, please contact LINAK.